COLORADO STATE FOREST

BOULDER DISTRICT 5625 Ute Highway Longmont, CO 80503 (303) 823-5774 - (303) 823-5768/F ax



DATE: 5-23-0	NUMBER OF PAGES 4 (including this page)
TO: Abbie	
FAX NUMBER:_	303-642-3128
FROM: Nicole	Pakitro
SUBJECT: \w.\.	fre Mit Plan
COMMENTS:	

DIRECTIONS FOR FILLING OUT FORM:

CSFS BODIST

Please fill out as complete as possible and fax to Colorado State Forest Service at 303-823-5768 or mail to 5625 Ute Highway, Longmont CO 80503-9130, or bring to scheduled marking appointment.


Any Bolded categories will be filled in by the CSFS representative at the time of initial site visit and tree marking for the defensible space. If you have any questions about this form please feel free to contact us.

Wildfire Mitigation Plan FIELD DATA FORM

Inspection Date:		
Landowner name:	Chad + Abbie Konnay	
Mailing address:	Po. Box 7363	
City, State. Zip:	Golden CO 80403	
Site address:	44 Wonder Test Golden	(08080)
Phone number:	303-612-0308	
Road access:	Moth of Highway 72	(Directions from main access road)
Docket Number:	58 hw-07-038	(SPR, LU, Etc.)
Section:		
Township:		
Range:		
Legal Description:		

	Elevation:	8888	(feet)
	Lot size (acres):	. <u>//3</u> (A	cres)
	Number of Structure	s: <u>)</u> (A	II structures presen:)
	Existing Structures:	House	(House/barn/garage/etc.)
	New Structure:	NewAddion	(House/Barn/new addition/etc)
	Structure SQR. FT.:	650 Grist 197	9 Now (Total square feet of structure)
	Structure aspect:	Soth '	(Dominant facing direction/view)
	Driveway length:	31 New:	(Actual length in feet from road to home)
_	Driveway tres remo	oved:(few/r	many/none)
	Home buffer materia	al: graves &	(Stone/crushed gravel/decorative stone)
	House design:	Sinde (sin	mple/complex)
	Roof Design:	Simple (sin	mple/complex)
	Roof material:	Asphalt Fibers	(Asphalt shingles/concrete tiles/metal)
	Soffits type:	Wood	(Plyw ood/hardboard/cement board)
	Siding material:	Wasal	(Cement/hardboard/log/stucco/stone/wood)
	Windows (#):	13-22 (ar	proximate number of windows)
	Sliding Glass Doors	(#)	
	Window wells (#) _	-	
	Windows Size:	Medium (0	n average: small/n edium/large)
	Windows Frames:	Wood Frame a	(alum inum/aluminum clad)
	Windows A spect:	All Sides	(Dominant viewing direction)
	-Window Construction	on: Love	(Tem pered glass/e-coating/etc.)
	Door Material:	Steel Dars	(Wood/steel/fiberglass/composite)

	A			
(8	Deck material:	Was	(Wood/composite materials)	
(8)	Deck Description:	pen undertoker	(Enclosed/open underneath and overhead)	
R	Deck support type:	set	(Timb at posts/logs/steel/concrete/stone)	
	Deck buffer material:		(Crusl ed rock/gravel)	
	Deck weed barrier:		(Fiber glass/polyester)	
	Garage if detached:	NONE	(Total square feet of garage)	
	Out buildings:		(Total square feet of sheds, cabins, ect)	
	Making a donation to	community cistern:	(Yes or No)	
	Have you talked to yo	our local fire department:	(Yes on No)	
	Are you required to h	ave a sprinkler system:	(Yes or No)	
	Cistern:		(Distrace from house, and direction)	
	Cistern Type:	<u></u>	(Individual Cistern or Fire Cistern)	
	Cistem size		(gallens)	
	Utility Location:	Pole 20+1- East	(Pole/buried: Direction from structure)	
	Leach field:	40' West	(Distrace from house, and direction)	
	Water supply:	Vell	(well or main line)	
	Well (if applicable):	10, 1194H	(Distruce from house and direction)	
	Propane or natural ga	us:		
Cholo	Propane Tank location	n:	(Dist ace from house and direction)	
	Slash disposal:	Host	(Chipped/hauled/burned/lop-scatter)	
	Can you provide a co	ppy of the plan:	_(Yes or No)	

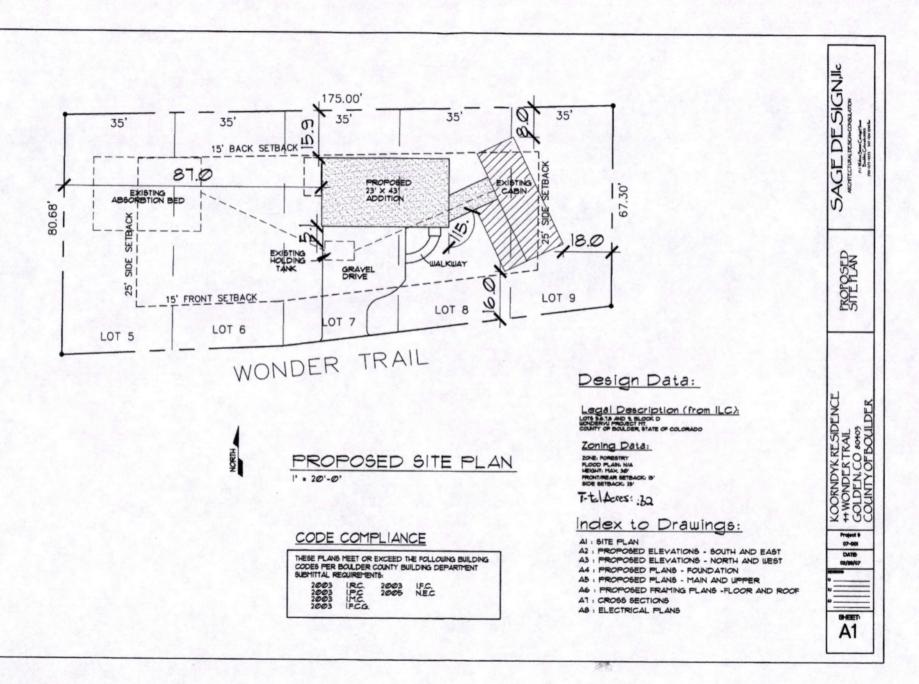

WILDFIRE MITIGATION PLAN

For Chad and Abbie Koorndyk 44 Wonder Trail Docket: SPRW - 07 - 028

Inspection date: 5/29/2007

Prepared for:

Chad and Abbie Koorndyk PO Box 7363 Golden, CO 80403 Phone: 303-642-0308



Prepared by:

Matthew Jedra Forester - Boulder District Phone: (303) 823-5774

E-mail: mjedra@lamar.colostate.edu

Boulder District

5625 Ute Highway Longmont, Colorado 80503-9130 (303) 823-5774

PURPOSE OF A WILDFIRE MITIGATION PLAN

The purpose of a Wildfire Mitigation Plan is to give guidelines for reducing wildfire hazards around a home or other structures through fuels reduction. It is a document to inform urban interface home owners of the dangers and responsibilities of living in the interface. This plan will help outline the initial and ongoing fuels reduction needed to create and maintain an effective wildfire defensible space. However, having a wildfire mitigation plan, implementation of a defensible space thinning, and following all the recommendations as outlined in this plan does not guarantee that your home will survive a wildland fire; however, in combination they will give your home the best potential probability to survive a wildland fire.

SITE LOCATION AND PROPERTY DESCRIPTION

The property is located at Section 36, Township 1S, Range 72W in, Boulder County, Colorado. The fire protection district is the Coal Creek Fire Protection District (303-642-3121). There is one existing 650 square foot structure on the site. The proposed new addition which will be 1,329 sq/ft. A total of 1,979 square feet will exist on the property. The lot is .113 acres in size and has a modest ~20-40% percent slope with a south aspect. The site is at 8,888 feet in elevation and located on a midslope which is relatively dry. The road to the south and north creates a small natural barrier that may help stop or slow the spread of a surface/crown fire on the site.

CONSTRUCTION DESIGN AND MATERIALS

The proposed house will have a moderately complex design with a moderately complex roofline and will be oriented with a south aspect. The overall design of the structure greatly influences how it will withstand a wildfire. Complex building forms create heat traps, areas where the walls and roof members intersect on another where eddies form and hot air and embers from a fire can collect. It is important to keep these areas clear of combustibles such as needles and brush.

The roofing material will consist of fiberglass shingles. Falling embers and fire brands from a wildfire can land on a roof and ignite the roof, either by directly heating the roofing material, or by igniting light fuels (pine needles) that have collected on the roof. It is recommended to place screening over gutters and/or make a yearly check to keep them clear of leaves and needles.

The exterior wall material is to be wood on the new addition and the existing structure. Soffits and fascia are to be 3/4" thick wood.

The structure has 22 medium sized windows with the primary viewing direction being toward the south side of the structure. Windows are double glazed with Low-E coating and tempered glass where required. Frames are made of wood and aluminum clad. Exterior doors are 1-3/4", fire-rated, and made of steel. All operable windows must be provided with screening that is constructed of either aluminum, galvanized steel, copper or of an approved material that when exposed to flame for 15 seconds, will not burn through or melt, and remains intact. Windows are one of the weakest parts of a structure with regards to wildfire. They often crack and fail before the structure itself ignites, providing a direct path for embers and radiant heat to reach the interior. It is best to minimize the number of windows, especially on the downhill side of the structure. Fire typically burns up hill faster and will create a great deal of radiant heat.

A deck will be constructed of wood materials and supported by timber posts. The deck will be open overhead and underneath and isolated from the surrounding landscape with crushed rock over a fiberglass weed barrier. This material should be spread underneath the entire deck surface and to 2' past the drip-line of the deck.

UTLITIES

No propane tank exists on the property. Utilities for the property are from a pole ~20 feet from the house. The septic field is located ~140 feet to the west of the residence. A well is located ~10 feet to the north of the residence.

DRIVEWAY ACCESS FOR EMERGENCY VEHICLES

The property is located on the North of highway 72, East of Wondervue Café 1/10 mile on the Right. The existing driveway will not create additional site disturbance or soil compaction and will require the removal of no trees. The driveway should be 12 feet wide with a vertical clearance of 13'6" and a grade that is less than 12%. The driveway is approximately 60 feet long therefore no turn around will be required. The driveway is less than 400 feet therefore no pull-outs will be required.

EMERGENCY WATER SUPPLY FOR FIRE FIGHTING

Landowners will be contributing to a community cistern. Contact the Coal Creek fire protection district (303-642-3121) for more information and specific details.

FUELS REDUCTION

All trees to be removed are marked with blue spray paint. All trees that are to remain within zones 1 and 2 will be unmarked. If the property is less than 1 acre it may not have zones marked due to boundary interference. Harvested wood that remains on site will be stacked at least 30 feet from the house and at the same elevation when possible. Slash from the harvest will be haul off site and left for fire wood and. Note that if you decide to burn piles, you must obtain a valid Open Burning Permit from the Boulder County Environmental Health Department (303-441-1180) and notify your local fire protection district (Coal Creek fire protection district (303-642-3121).

FOREST COMPONENT AND HEALTH

The site has a dominant overstory consisting of lodgepole pine (Pinus contorta) with a lodgepole pine, Douglas-fir (Pseudotsuga menziesii) component. The understory consists of a sparse cover of native grass and forbs. The forested area is best represented by Fuel Model 9. Fuel Model 9 is represented by closed canopy stands of lodgepole pine and mixed conifer. Understory may consist of small trees and shrubs, grasses and moderate concentrations of down, dead woody litter. High amounts of needle litter may be present. This model can exist from foothills to subalpine. There were no current signs of insect or disease problems on the property at the time of the inspection.

DEFENSIBLE SPACE MANAGEMENT

There are three defensible space zones to be created around the structure(s) on the site. Please note that it is possible that one or more of these zones will cross over the subject property onto adjacent properties. Property boundaries must be respected; mitigation work is not required beyond immediate boundaries. However, landowners are encouraged to contact and work with neighbors if property lines limit the ability to mitigate within the prescribed area. **Defensible space** is a benefit, not only to the individual but also to the community as a whole.

- **Zone 1** Starts at the foundation and extends out 15 feet in all directions from the outside edge of the structure(s). Zone 1 is broken down into three segments:
 - **Zone 1A** Consists of the structure(s) themselves and the area immediately adjacent to and surrounding the structure(s) on all sides. A five-foot wide, non-flammable strip should be created using gravel over a fiberglass weed barrier material. This strip will also extend back under, and out to, two feet past the drip line of any decks.
 - **Zone 1B** Extends out from Zone 1A. In this zone, all highly flammable vegetation should be removed. Any large dead woody material on the ground should also be removed. Firewise plants should be used for landscaping and re-vegetation. Grasses should be irrigated when possible and mowed to a maximum height of 6 to 8 inches twice per growing season to a distance of 30 feet from the structure.
 - **Zone 1C** This zone extends out from Zone 1B to 15 feet from the house. All understory trees (ladder fuels) should be removed as marked. These are small seedling and sapling size trees that can be ladders for fire to get in the crowns of the larger trees. A few of the larger, healthy trees can to be retained for screening. All remaining trees in this zone should be pruned to a height of 10 feet. They must be well spaced so that the crowns are not touching (10 foot minimum crown spacing). No trees should overhang the house or decks, unless approved by Boulder County or CSFS as "part of the structure" with additional fuels reduction around those trees to insure the defensible space integrity. Trees should be at least 15 feet away from the house on all sides, and a minimum of 10 feet from chimneys.
- **Zone 2** This zone extends out from Zone 1C, and acts as a transition zone between the heavily thinned areas near the house to the existing forest setting. It extends down slope between 100-170 feet depending upon slope steepness. Zone 2 also extends on either side of the structure a minimum of 100 feet and behind the house between 70-100 feet assuming

no boundary restrictions. Tree spacing begins as in Zone 1C and gradually decreases as you approach the outer edge of the zone. Thinning and crown spacing becomes greater in areas of steep slopes. Ladder fuels and poor quality, suppressed and/or diseased trees, 6 to 8 inches in diameter, make up the majority of the removals. The remaining mature trees should be pruned to a height of 10 feet at the intersection of Zones 1 and 2 with limbing reduced in height to 6 feet as you approach Zone 3. If there are any questions pertaining to slope and the changes in thinning spacing and distance regulations please refer to www.colostate.edu/Depts/CSFS/ and find the Quick Facts 6.302 Creating Wildfire Defensible Space.

Zone 3 - This zone extends out from Zone 2 to the edge of the property. It may extend out to areas that are not part of the immediate mitigation efforts. In this zone, a few thicker clumps of trees are acceptable, as well as some unpruned trees near the outer edge. Thinning in this zone adds some protection, but is aimed more at forest health. Trees that are of poor quality or form, or have insect or disease infestations, should be removed. Slash in this zone can be lopped and scattered and/or piled for wildlife use.

- Thin suppressed trees and trees with disease and insect infestations and retain the larger, healthier trees.
- · Snags can be retained for wildlife.
- Some slash in this zone can be lopped and scattered and/or piled for wildlife enhancement and shelter.
- · Large amounts of slash should be disposed of by chipping, hauling to an approved site, or burning.
- · For burning permits, check with your local fire protection district.

MAINTENANCE AND RECOMMENDATIONS

As detailed in fact sheet 6.302, <u>Creating Wildfire Defensible Zones</u>, an important factor that determines a structure's ability to survive wildfire is defensible space. Defensible space is a maintained area around a structure where fuels (flammable materials) are modified to slow the possible spread of wildfire to the structure, as well as from the structure to the surrounding areas. Defensible space provides a place where structure protection and fire suppression operations may occur. Wildfire hazard mitigation work breaks up fuel continuity, potentially decreasing a wildfire's intensity, and for more effectiveness should be completed beyond a home's defensible space, zone 1 and 2, area into zone 3.

In addition to the above recommendations, several other measures can be taken to make your home more fire safe and add an additional measure of safety for your family. While not required through site plan review, the following measures should be undertaken to maintain the home and defensible space in the future.

- Maintain your defensible space yearly; contact your local forester for a 5-year maintenance inspection
- Establish an escape route and safety zone with the aid of your local fire protection district
- Keep firewood at least 30 feet away from buildings; clear weeds and grass from around pile
- Do not stack fresh cut wood against live trees this could invite unwanted insects
- When possible, maintain an irrigated green space; mow grasses 6" to 8" high
- · Connect, and have available, a minimum of 50 feet of garden hose with an adjustable nozzle
- Have an emergency evacuation plan in place (included in wildfire mitigation plan)
- Be aware of fire danger; check the Boulder Fire Weather website at www.crh.noaa.gov/bou/awebphp/fireindx.php.html
- · Keep driveways and property address marked with reflective easy to see signs
- · Maintain screens on foundations, soffit vents, roof vents, and attic openings
- Get rid of unnecessary accumulations of debris and trash from yards
- Keep tools such as shovels, rakes, ladders, and axes available and ready for use
- · Clean debris from the roof and gutters at least two times annually
- · Check screens and maintain spark arresters on chimneys annually
- · Avoid storing combustibles under decks such as wood piles, scrap lumber, and fuels

DEFINITIONS

Aspect - Exposure. The direction a slope faces.

Canopy - The cover of branches and foliage formed collectively by crowns of adjacent trees.

Crown - Branches and foliage of a tree.

<u>Dominant fuel type</u> – Matter that would carry a fire, found on the ground.

Duff – a layer of accumulated dead organic matter (pine needles).

Eddies – Small wind occurrences that are separate from normal wind flows.

<u>Fuel Model</u> – A number system that identifies the types of fuels found on the property that will directly influence fire behavior.

<u>Fire danger</u> - An assessment of both fixed and variable factors of the fire environment, which determine the ease of ignition, rate of spread, difficulty of control, and the fire impact.

<u>Fire hazard</u> - The potential fire behavior for a fuel type, regardless of the fuel type's weather-influenced fuel moisture content or its resistance to fireguard construction. Assessment is based on physical fuel characteristics, such as fuel arrangement, fuel load, condition of herbaceous vegetation, and presence of elevated fuels.

<u>Fire management</u> - The activities concerned with the protection of people, property and forest areas from wildfire and the use of prescribed burning for the attainment of forest management and other land use objectives, all conducted in a manner that considers environmental, social and economic criteria.

Fire risk - The probability or chance of fire starting determined by the presence and activities of causative agents.

Fuel continuity - The proximity of fuels to each other. Helps determine if a fire can sustain itself.

<u>Forest health</u> - A forest condition that is naturally resilient to damage; characterized by biodiversity, it contains sustained habitat for timber, fish, wildlife, and humans, and meets present and future resource management objectives.

<u>Ladder fuels</u> - Fuels that provide vertical continuity between the surface fuels and crown fuels in a forest stand, thus contributing to the ease of torching and crowning.

Limb (verb) -To remove the branches from a tree.

<u>Noxious weeds</u> - Any weed so designated by the Weed Control Regulations and identified on a regional district noxious weed control list.

Overstory – The tree species that forms the uppermost forest layer (dominant and co-dominant).

<u>Slash</u> – The residue left on the ground as a result of forest and other vegetation being altered by forest practices or other land use activities.

Snag – Standing dead tree, often used by wildlife such as woodpeckers, owls, and other various mammals.

Understory – Plants that grow underneath the overstory species.

<u>Wildland urban interface</u> – a popular term used to describe an area where various structures (most notably private homes) and human developments meet or are intermingled with forest and other vegetative fuel types.





Annual fire safety checklist

- Thin trees and brush properly within defensible space.
- Remove trash and debris from defensible space.
- · Remove needles and pine cones from window wells.
- Remove trees growing through a porch or other portions of a structure.
- Clear leaves and debris from the roof and gutters of structures.
- · Remove branches that overhang a chimney or roof.
- Stack firewood uphill from a home or on a contour away from the home.
- Use noncombustible roof materials.
- Place shutters, fire curtains or heavy drapes on windows.
- Place screens on foundation and eave vents.
- · Enclose sides of stilt foundations and decks.
- Remove any combustibles from under decks, porches or entrances ways.
- Use a chimney screen or spark arrester in fireplaces.
- · Clear vegetation from around fire hydrants, cisterns, propane tanks, etc.
- Place placards on garages if storing flammable materials inside.
- Make sure that an outdoor water supply is available with a hose, nozzle and pump.
- Post address signs that are clearly visible from the street or road.
- Make sure that driveways are wide enough for fire trucks and equipment.
- Check with appropriate highway agencies to make sure load limits are posted on bridges and for the appropriate protocol for posting load limits for bridges on private property.
- Install and test smoke detectors.
- Practice a family fire drill and evacuation plan.

Evacuation tips

- If a wildfire is threatening your area, listen to the radio for updated reports and evacuation information.
- Confine pets to one room and make plans to take care of them in the event of evacuation.
- Arrange for temporary housing with a friend or relative whose home is outside the
 threatened area. Leave a note in a prominent place in your home that says where and
 how you can be contacted.
- If your home is threatened by wildfire, you will be contacted and advised by law
 enforcement officers to evacuate. If you are not contacted or you decide to stay and help
 defend your home, evacuate pets and family members who are not needed to protect
 your home.
- Remove important documents, mementos, etc. from the possible fire area.
- Choose an evacuation route away from the fire if possible. Watch for changes in the speed and direction of the fire and smoke.

manmade safety zones could be pre-constructed sites such as clear cuts. It should be close enough to your home to consider escape time to reach the safety zone. They should not be located upslope or downwind of the fire or in heavy fuels.

- 1. Avoid locations that are downwind from the fire.
- 2. Avoid locations that are in chimneys, saddles, or narrow canyons.
- 3. Avoid locations that require a steep uphill escape route.
- Take advantage of heat barriers such as lee side of ridges, large rocks, or solid structures.
- 5. Burn out safety zones prior to flame front approach.
- 6. For <u>radiant heat only</u>, the distance separation between you and the flames must be at least four times the maximum flame height. This distance must be maintained on all sides, if the fire has ability to burn completely around the safety zone. Convective heat from wind and/or terrain influences will increase this distance requirement.

Calculations Assuming No Slope and No Wind

Flame Heights	Distance separation	Area in Acres
10 feet	40 feet	1/10 acre
20 feet	80 feet	1/2 acre
50 feet	200 feet	3 acres
75 feet	300 feet	7 acres
100 feet	400 feet	12 acres
200 feet	800 feet	50 acres

<u>Note</u>: Distance separation is the radius from the center of the safety zone to the nearest fuels. When fuels are present that will allow the fire to burn on all sides of the safety zone this distance must be doubled in order to maintain effective separation in front, to the sides, and behind the person.

Area in Acres is calculated to allow for distance separation on all sides for a https://example.com/three-person family and a vehicle. One acre is approximately the size of a football field or exactly 208 feet x 208 feet.

Example: Given a fire with 10 foot flame heights (no wind or slope). You would need a minimum of 40 feet between you and the flames. So your total safety zone should be 80 feet x 80 feet. If you are settled into the middle of the safety zone you will have a minimum distance of 40 feet to each edge of the zone.



