

A STUDY OF RAPIDLY VARYING FLOW IN ALLUVIAL CHANNELS

by

D. B. Simons¹

and

E. V. Richardson¹

Synopsis

Alluvial channel stage and depth discharge relations were studied in a large sand bed recirculating flume. The form of the stage or depth discharge relation is intimately related to:

1. Regime of flow
2. Form of bed roughness
 - a. Characteristics of the bed material
 - b. Concentration of fine sediment
 - c. Temperature
3. Rate of change of discharge with time

In the range of shear which develops ripples and dunes on the bed the rising stage curve is usually quite different from the falling stage curve, and these curves are only valid for the conditions upon which they are based -- no general solution is possible. In the range of shear which develops plane bed, standing sand and water waves which are in phase, and antidunes the rising and falling stage curves coincide and hold for all values of discharge associated with these forms of bed roughness.

¹Hydraulic Engineer, U.S.G.S., Colorado State University

When a channel experiences a shear which develop dunes at small discharges and plane bed and perhaps standing waves and antidunes at larger discharges, there is a discontinuity in the stage or depth-discharge curves particularly on the rising stage which occurs when the dunes wash out. This is caused by the large reduction in resistance to flow, which occurs when the bed form changes from ripples or dunes to plane bed, standing waves, or antidunes, and the resultant reduction in depth and stage even though discharge is increasing.

REGIMES OF FLOW AND FORMS OF BED ROUGHNESS IN ALLUVIAL CHANNELS

In a rigid channel a well defined depth or stage-discharge curve can be developed which has only minor scatter and in most cases no discontinuities. When developing stage-discharge curves for alluvial streams, this ideal condition is not the usual case. Because of the extreme variation which occurs in the resistance to flow as discharge and form of bed roughness vary, and because of the effect of rate of change of discharge with time on the rate of development of the various forms of bed roughness, the stage discharge curve can be of several different forms. In fact, several different forms are possible at a single station unless the shear on the bed is always large enough that ripples and dunes do not develop. If one is not aware of the possible changes in the form of bed roughness which cause the shape of the stage-discharge curve to vary from time to time and flood to flood, it is impossible to explain the apparent haphazard scatter of points which results. Unfortunately, in many cases, this scatter has often been blamed on the inaccuracy of measurements. Usually, this is not the case.

The regimes of flow and forms of bed roughness as discussed by Simons and Richardson (1959a) can be summarized as follows:

Tranquil Flow Regime, $Fr < 1$ (Based upon local values of velocity and depth)

Plane bed (no sediment movement)

Ripples

Dunes with ripples superposed

Dunes

Transition (washed out dunes)

Plane bed (depends on size of bed material)

Rapid Flow Regime, $Fr > 1$ (Based upon local values of velocity and depth)

Standing waves (depends on size of bed material)

Antidunes

Violent antidunes

The plane bed with sediment moving in the tranquil flow regime only occurs when the median size of bed material is approximately 0.4 mm and smaller. Standing waves only occur when the median size of bed material d is larger than approximately 0.4 mm. The major forms of bed roughness are illustrated in Figure 1. The major variables which influence the form of bed roughness are indicated in Equation 1.

$$\text{Bed Roughness} = \left[D, S, d, \sigma, c_f, \rho, \rho_s, \mu, s_f, w, f_s \right]^{-1}$$

in which

D is the depth

S is the slope of energy gradient

d is the median diameter of bed material

σ is the standard deviation of the bed material

c_f is the concentration of fine sediment

ρ is the mass density of the water

ρ_s is the mass density of the sediment

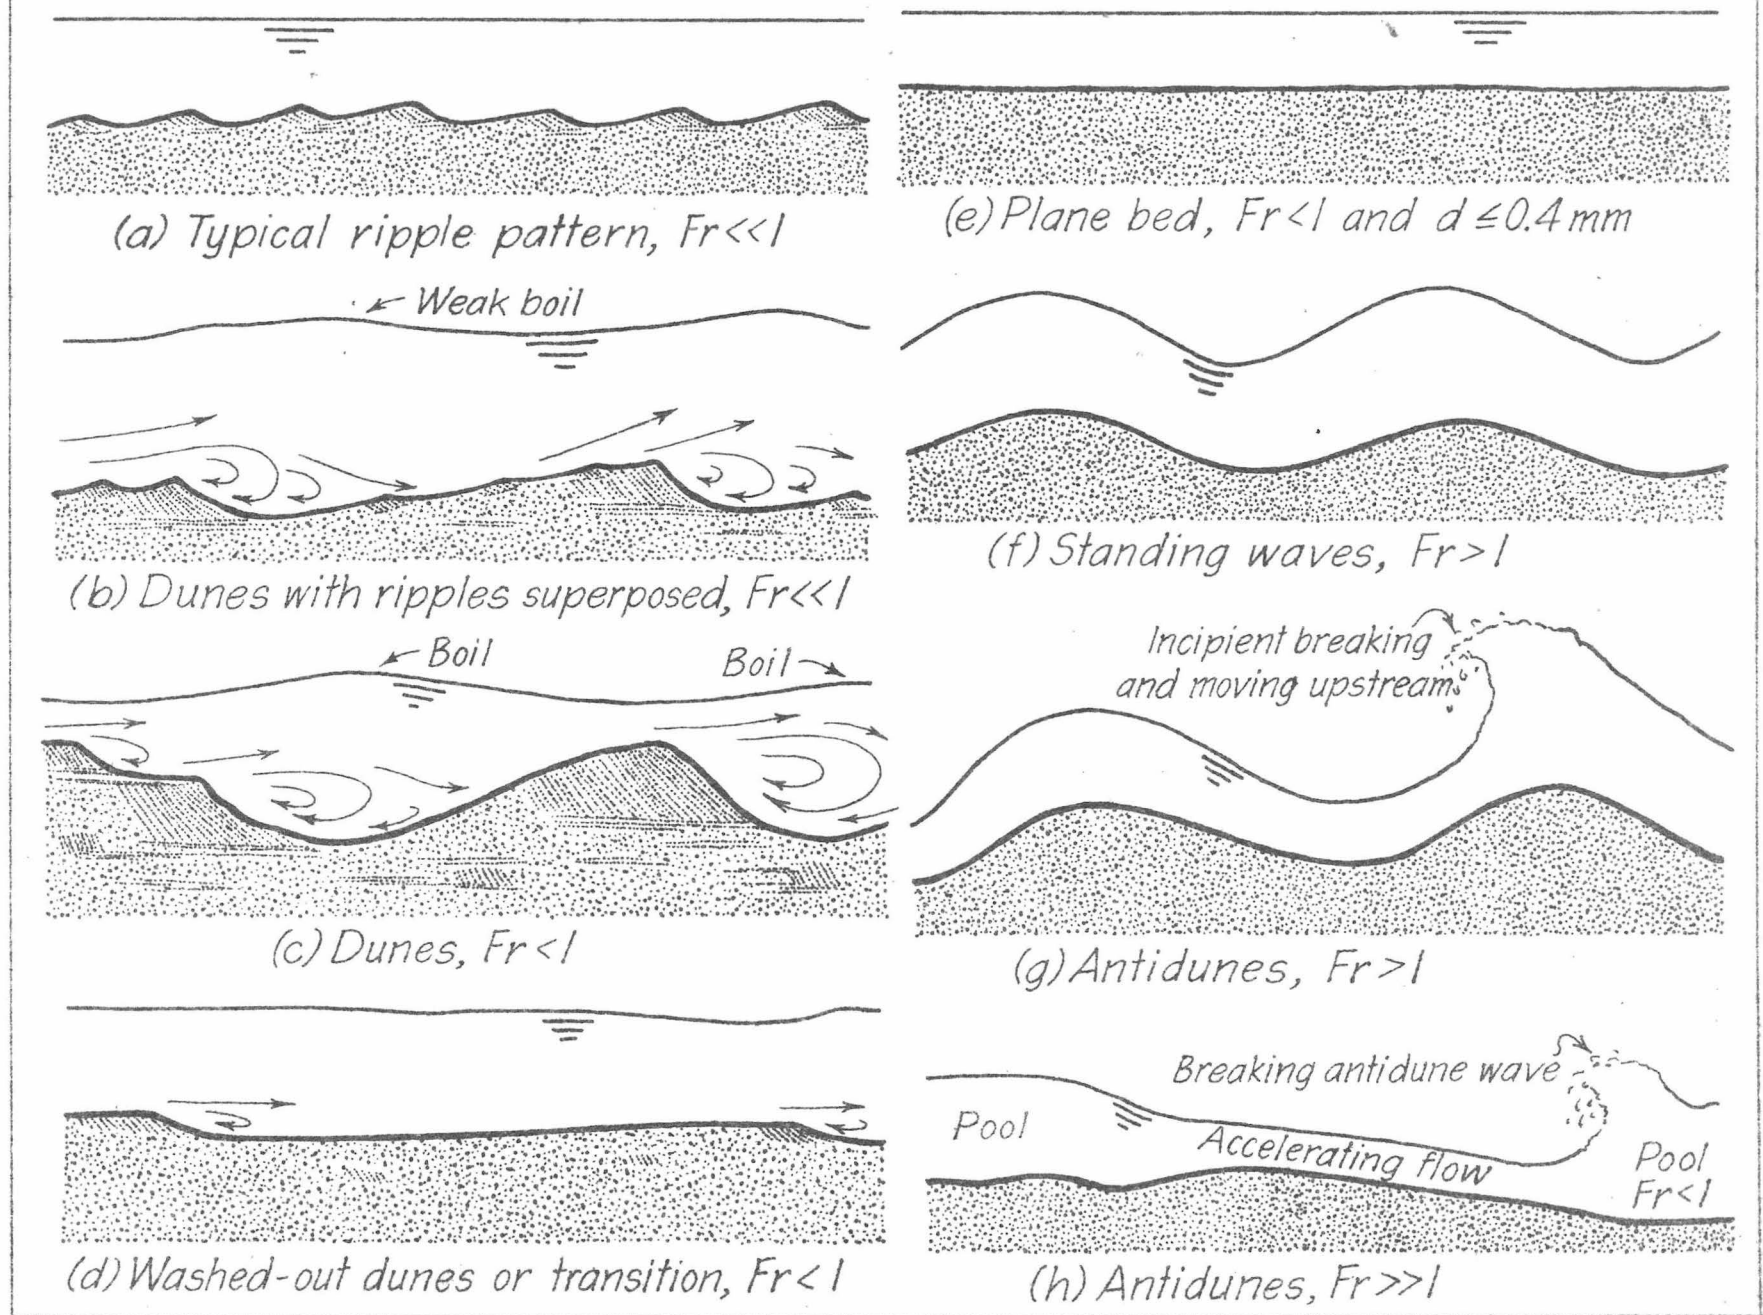


Fig. 1 Forms of Bed Roughness in Alluvial Channels

μ is the dynamic viscosity of the water

s_f is the shape factor of the cross section

w is the fall velocity of the bed material

f_s is the seepage force

In alluvial channels there is usually either inflow to or outflow from the channel through the bank and bed material which causes seepage forces. If there is inflow, the seepage force acts to reduce the effective size of the sand; and, consequently, the stability of the bed material. If there is outflow from a channel, the seepage force acts in the direction of gravity and increases the effective size of the sand and stability of the bed material. In effect, the seepage force reduces or increases the effective size of the bed material by changing its effective weight. As a direct result, the seepage forces can influence the form of bed roughness and the resistance to flow for a given channel slope, channel shape, bed material, and discharge. For example, a bed material with median diameter of 0.5 mm will be molded into the following forms as shear is increased: ripples, dunes, transition, standing sand and water waves, and antidunes. If this same material is subjected to a seepage force which reduces its effective weight to a value consistent with that of fine sand which has a median diameter $d = 0.3$ mm the forms of bed roughness will be ripples, dunes, transition, plane bed, and antidunes. The reason for this difference in the forms of bed roughness is illustrated in Fig. 2 which shows qualitatively the effect of size of bed material on forms of bed roughness. With the 0.5 mm sand, a break in the rating curve normally occurs as bed roughness changes from dunes to standing waves at a Froude number of one. However, with the seepage force in effect, a break in the rating curve can occur when the dune condition changes to plane bed at a Froude number of much less than one, probably at $Fr \approx 0.5$.

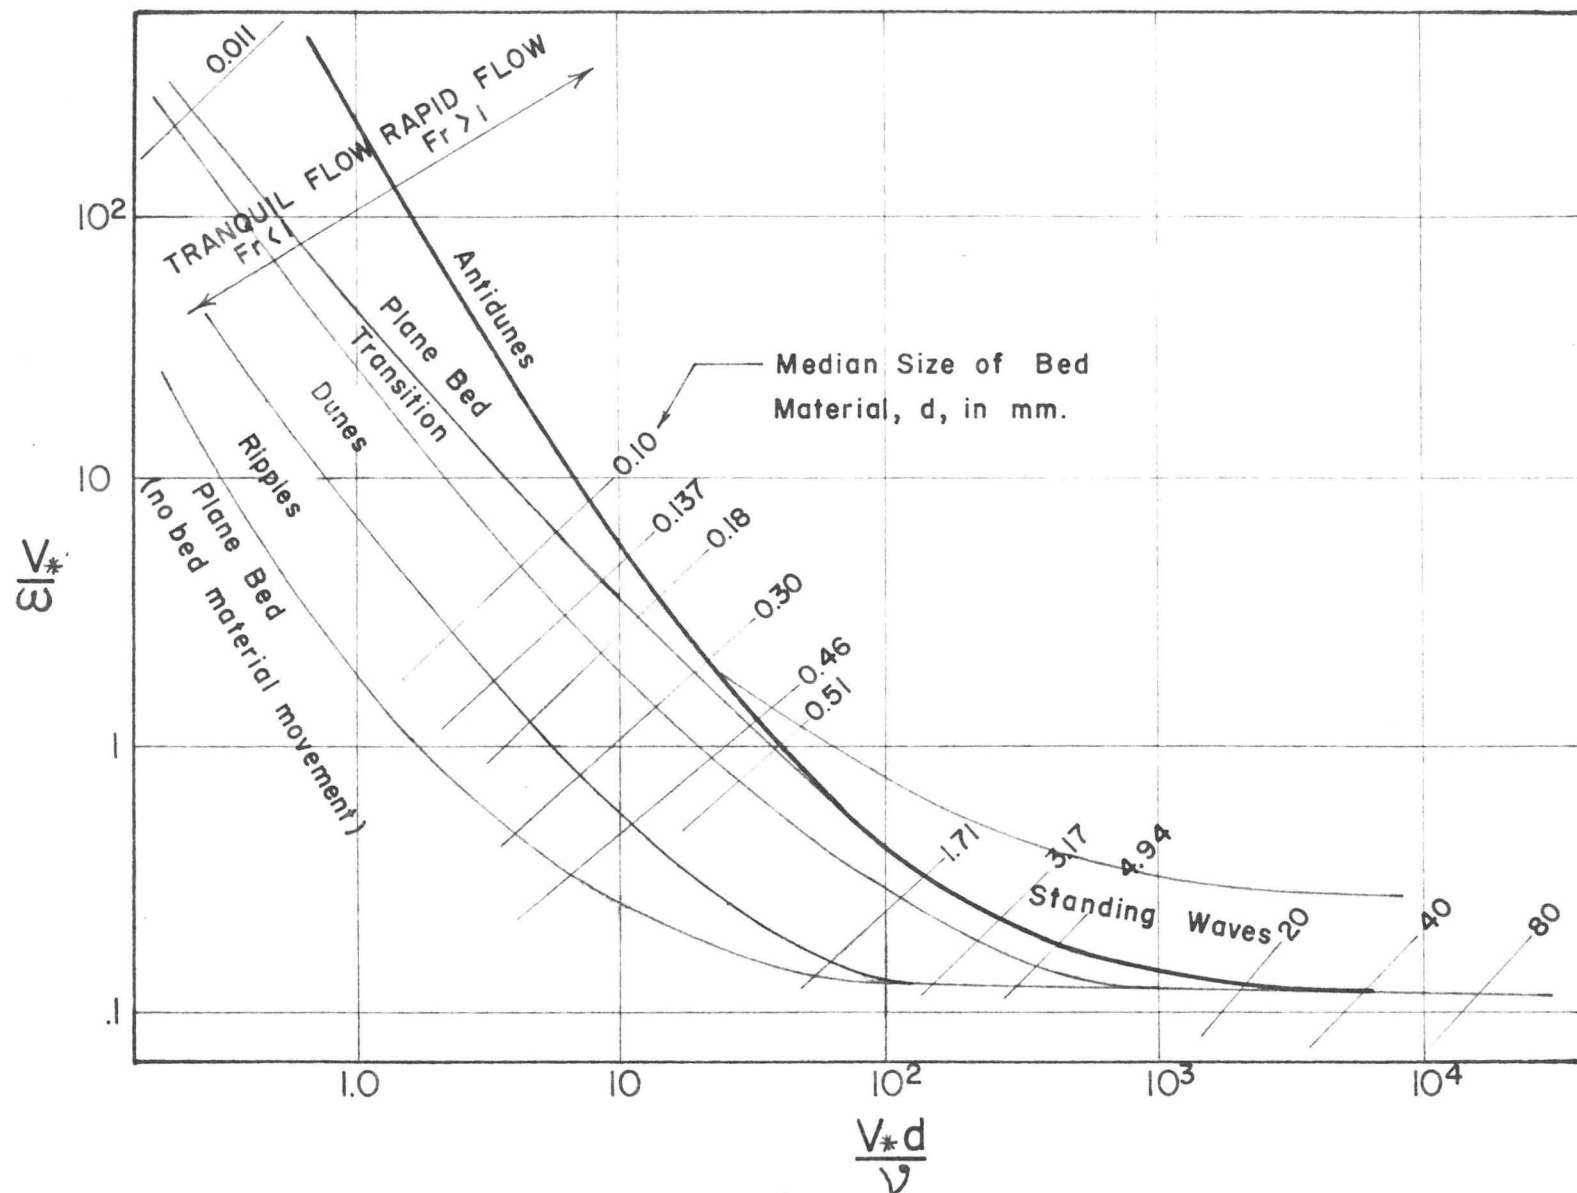


Fig. 2 Qualitative Concept of Regimes of Flow and Forms of Bed Roughness in Alluvial Channels.

With the seepage force acting with gravity, the 0.5 mm material acts as if it were coarser and again there is some effect on form of bed roughness and the stage-discharge relation.

A rather common field condition involves outflow from the channel during the rising stage which builds up bank storage and increases the stability of the bed and bank material. Then on the falling stage, the situation reverses. There is inflow to the channel due to the presence of bank storage which reduces the effective weight and stability of the bed and bank material. This field situation can also influence the form of bed roughness and the stage-discharge relations.

It has been shown by Simons and Richardson (1959c) that the presence of fine sediment in the water, such as clay, influences the resistance to flow. Using a bentonite clay, it has been determined in the laboratory that with concentrations of this type of fine sediment on the order of 40,000 ppm, resistance to flow in the dune range is reduced as much as 40 per cent. This fine material may reduce resistance to flow to an even greater extent under field conditions by decreasing the bank roughness as well as the bed roughness, and as previously discussed, any factor which influences bed roughness and resistance to flow will likewise alter the form of the stage-discharge relation. Also, fine sediment in the flow may change a standing wave condition into a breaking antidune with an increase in resistance to flow. Thus, the stage-discharge relationships for a stream may be different for clear water than for heavily sediment-laden flow.

Changes in temperature can alter the form of bed roughness; and hence, the resistance to flow. Vanoni and Brooks (1957) report that with an increase in temperature, there is a decrease in resistance to flow; whereas, Hubbell (1956) reports that with an increase in temperature, there is an increase in the resistance to flow. These two apparently contradicting statements, which show the effect of temperature variation, are easily explained

by considering the forms of bed roughness which existed in the alluvial channels in question, and the effect of temperature change on the fall diameter of the bed material. A decrease in temperature increases the viscosity of the water and decreases the fall diameter of the sand. Thus, a decrease in temperature decreases the effective size of a given sand. Consequently, if a sand bed is covered with small ripples and the temperature of the water is decreased, the mobility of the particles is increased due to the decrease in effective size of the sand larger ripples form, and resistance to flow increases. On the other hand, if the form of bed roughness is near to or in transition and there is a reduction in the temperature of the water the effective size of the bed material is reduced, the given shear causes the dunes to wash out to a greater extent or perhaps even causes the bed to become plane which; in either event, is accompanied by a decrease in resistance to flow. Both of these phenomenon are reversible.

RESISTANCE TO FLOW IN ALLUVIAL CHANNELS

The resistance to flow in alluvial channels whether in equilibrium or otherwise is largely dependent on the form of the bed roughness. In general, the resistance to flow is relatively small with plane bed prior to the beginning of bed material transport and increases in magnitude with increasing shear reaching a maximum value with ripples or dunes depending on the characteristics of the bed material. Resistance to flow is relatively large throughout the range of fully developed ripples and dunes. With further increase in shear, the transition condition is reached. At this point, resistance to flow reduces rapidly with further increase in velocity--as much as 300-400 per cent. The resistance to flow is minimum for a given bed material throughout the plane bed and/or standing wave range. Then as antidunes develop, the resistance to flow increases slightly and continues to increase with further increase in shear.

A more quantitative concept of the relationship between form of bed roughness, resistance to flow, and size of bed material can be obtained by referring to Fig. 3. This figure is based upon a study conducted in a large recirculating flume with alluvial bed (Simons and Richardson, 1959). Note that with the finer sand, the maximum resistance to flow occurs in the ripple range. This condition, which is related to the effect of size of bed material on forms of ripples and dunes, was discussed in a paper on forms of bed roughness by Simons and Richardson (1959a).

Based on the preceding concept of the regimes of flow, the forms of bed roughness, and resistance to flow in alluvial channels a realistic interpretation of stage-discharge curves, depth-discharge curves, and the peculiar variations which occur in them can be presented. These relations for both laboratory and field conditions will be considered.

In the field case the conditions are such that the variation of discharge Q with time is large, but the corresponding variation of slope is relatively small. Conversely, for laboratory conditions the variation in Q is small (limited by the capacity of the pumping plant) and slope can be varied over a large range at will.

EFFECT OF REGIME OF FLOW, AND FORM OF

BED ROUGHNESS, ON THE STAGE-DISCHARGE TYPE RELATIONS

To illustrate the effect of regime of flow and form of bed roughness on stage-discharge type relations, a series of runs were routed through a recirculating sand bed flume in which discharge and slope were varied.

In each run the discharge rate was changed in steps as indicated in Fig. 4. The duration of each run was approximately eight hours. During this time interval, Q was varied in steps of 3-4 cfs every 30-45 minutes from a minimum of 5 cfs to a maximum of 21.5 cfs. For each discharge on

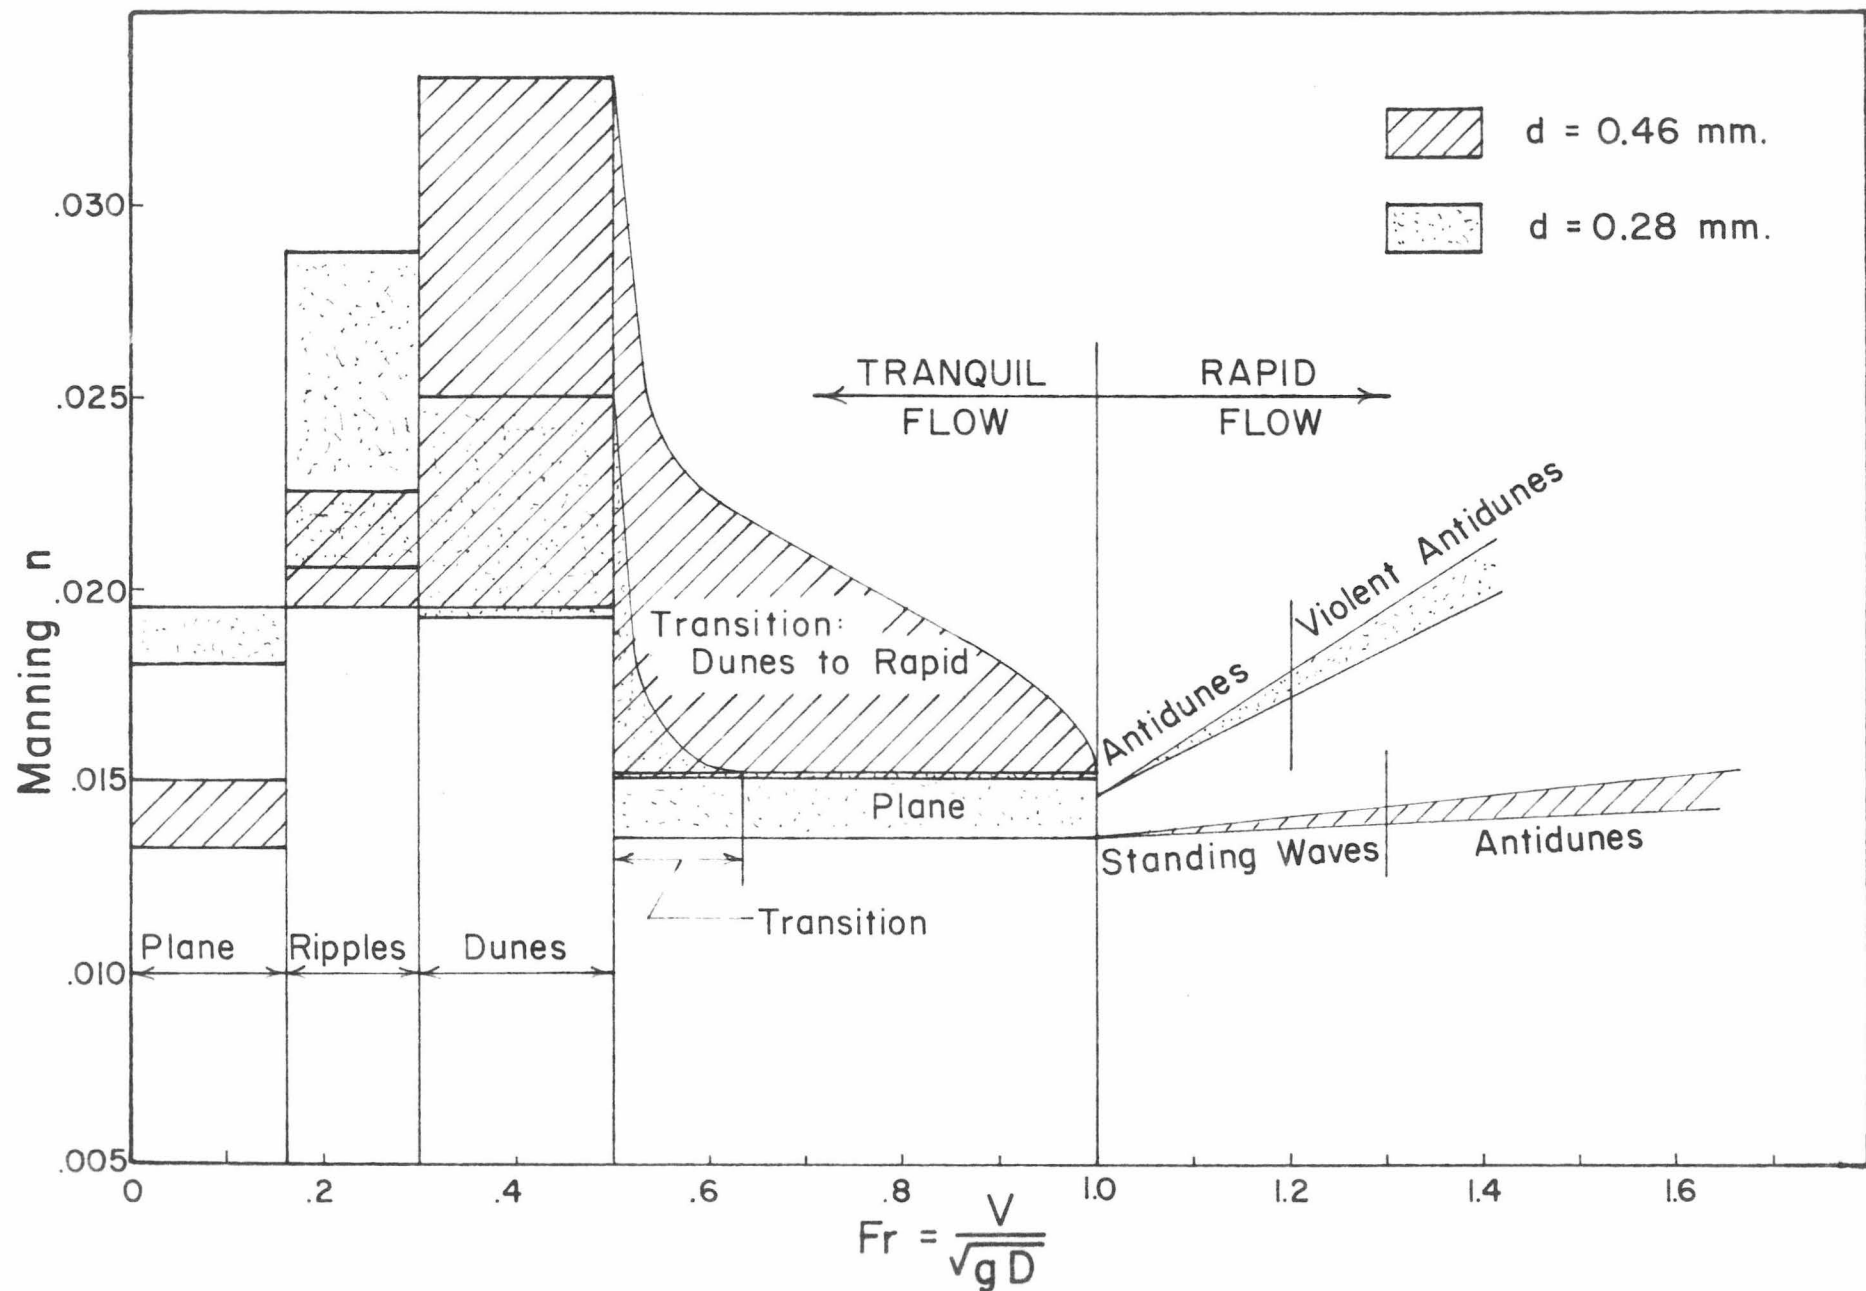


Fig. 3 Effect of Size of Bed Material on Form of Bed Roughness and Manning n

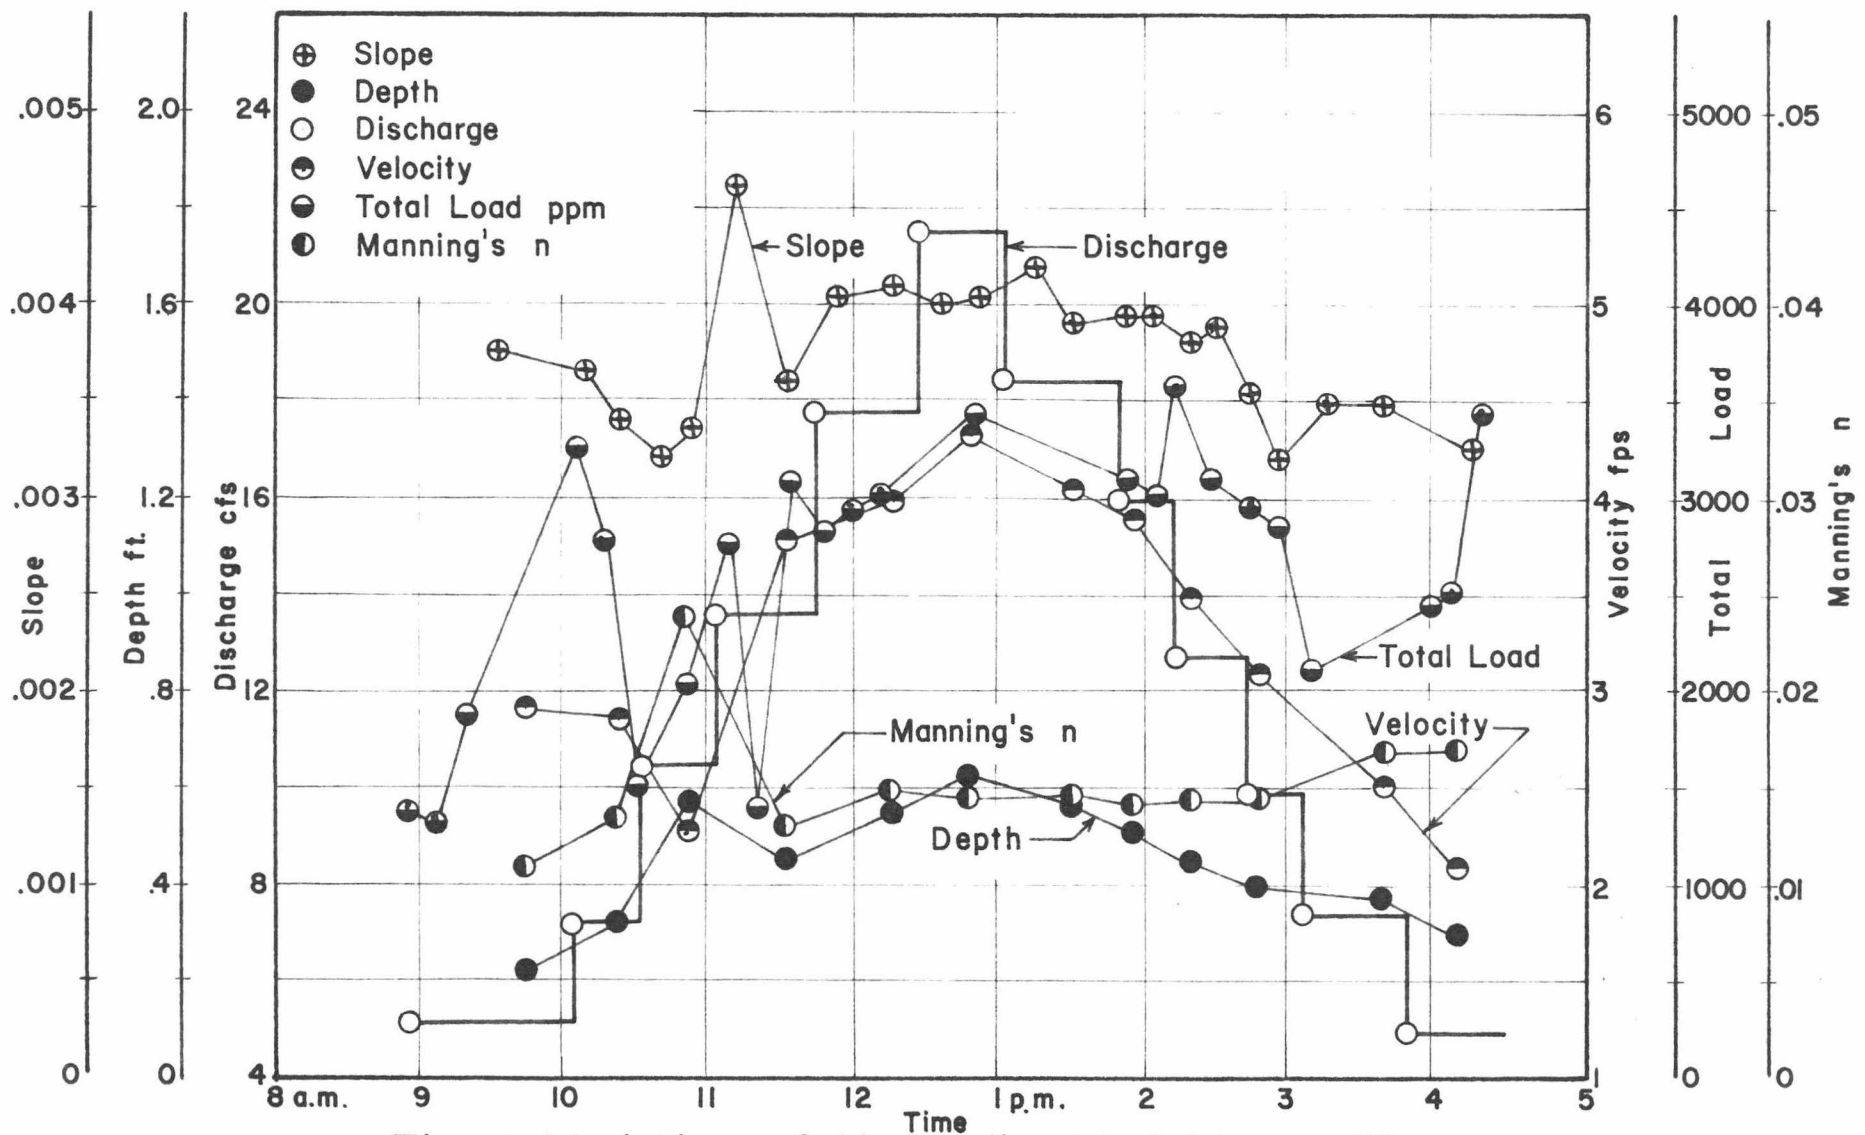


Fig. 4 Variation of Hydraulic Variables with Time for a Tranquil & Rapid Flow Hydrograph

both the rising and falling stages, the stage, depth, velocity, slope of water surface, total sediment load, and water temperature were continuously measured. The form of bed roughness and how it varied with discharge and time was carefully observed, described, and photographed. The characteristics of the bed material used in each case were determined beforehand. The methods used to measure the variables are described in detail by Simons, Richardson, and Albertson (1959). To observe the variation of the measured variables with time as discharge was changed, refer to Fig. 4. The accuracy of the discharge measurements were excellent. The accuracy with which the other variables such as slope, total load, velocity, stage, and depth were measured was limited because of the non-equilibrium condition of the flow, the relatively small number of measurements upon which the magnitude of a variable was based, and the natural variation of these variables with time and distance. For example, it has been verified that it is necessary to sample total sediment load more or less continuously over a 1-2 hour period in order to determine accurately total sediment transportation (Simons and Richardson, 1959b). In the case of these non-equilibrium runs sampling could only be carried out over a 15-30 minute interval; and in addition, sediment load was varying more radically with time than normally because once the run was started, there was never time for the channel to become completely stable before the discharge was changed.

In spite of the limited accuracy with which some of the variables were measured, the depth, discharge, and form of bed roughness data can be utilized to illustrate the importance of form of bed roughness on depth-discharge rating curves.

TRANQUIL FLOW RUN WITH CONSTANT CHANNEL SLOPE

The run upon which Fig. 5 is based was well within the tranquil flow regime. The sand bed had a median diameter of 0.45 mm. Flume conditions

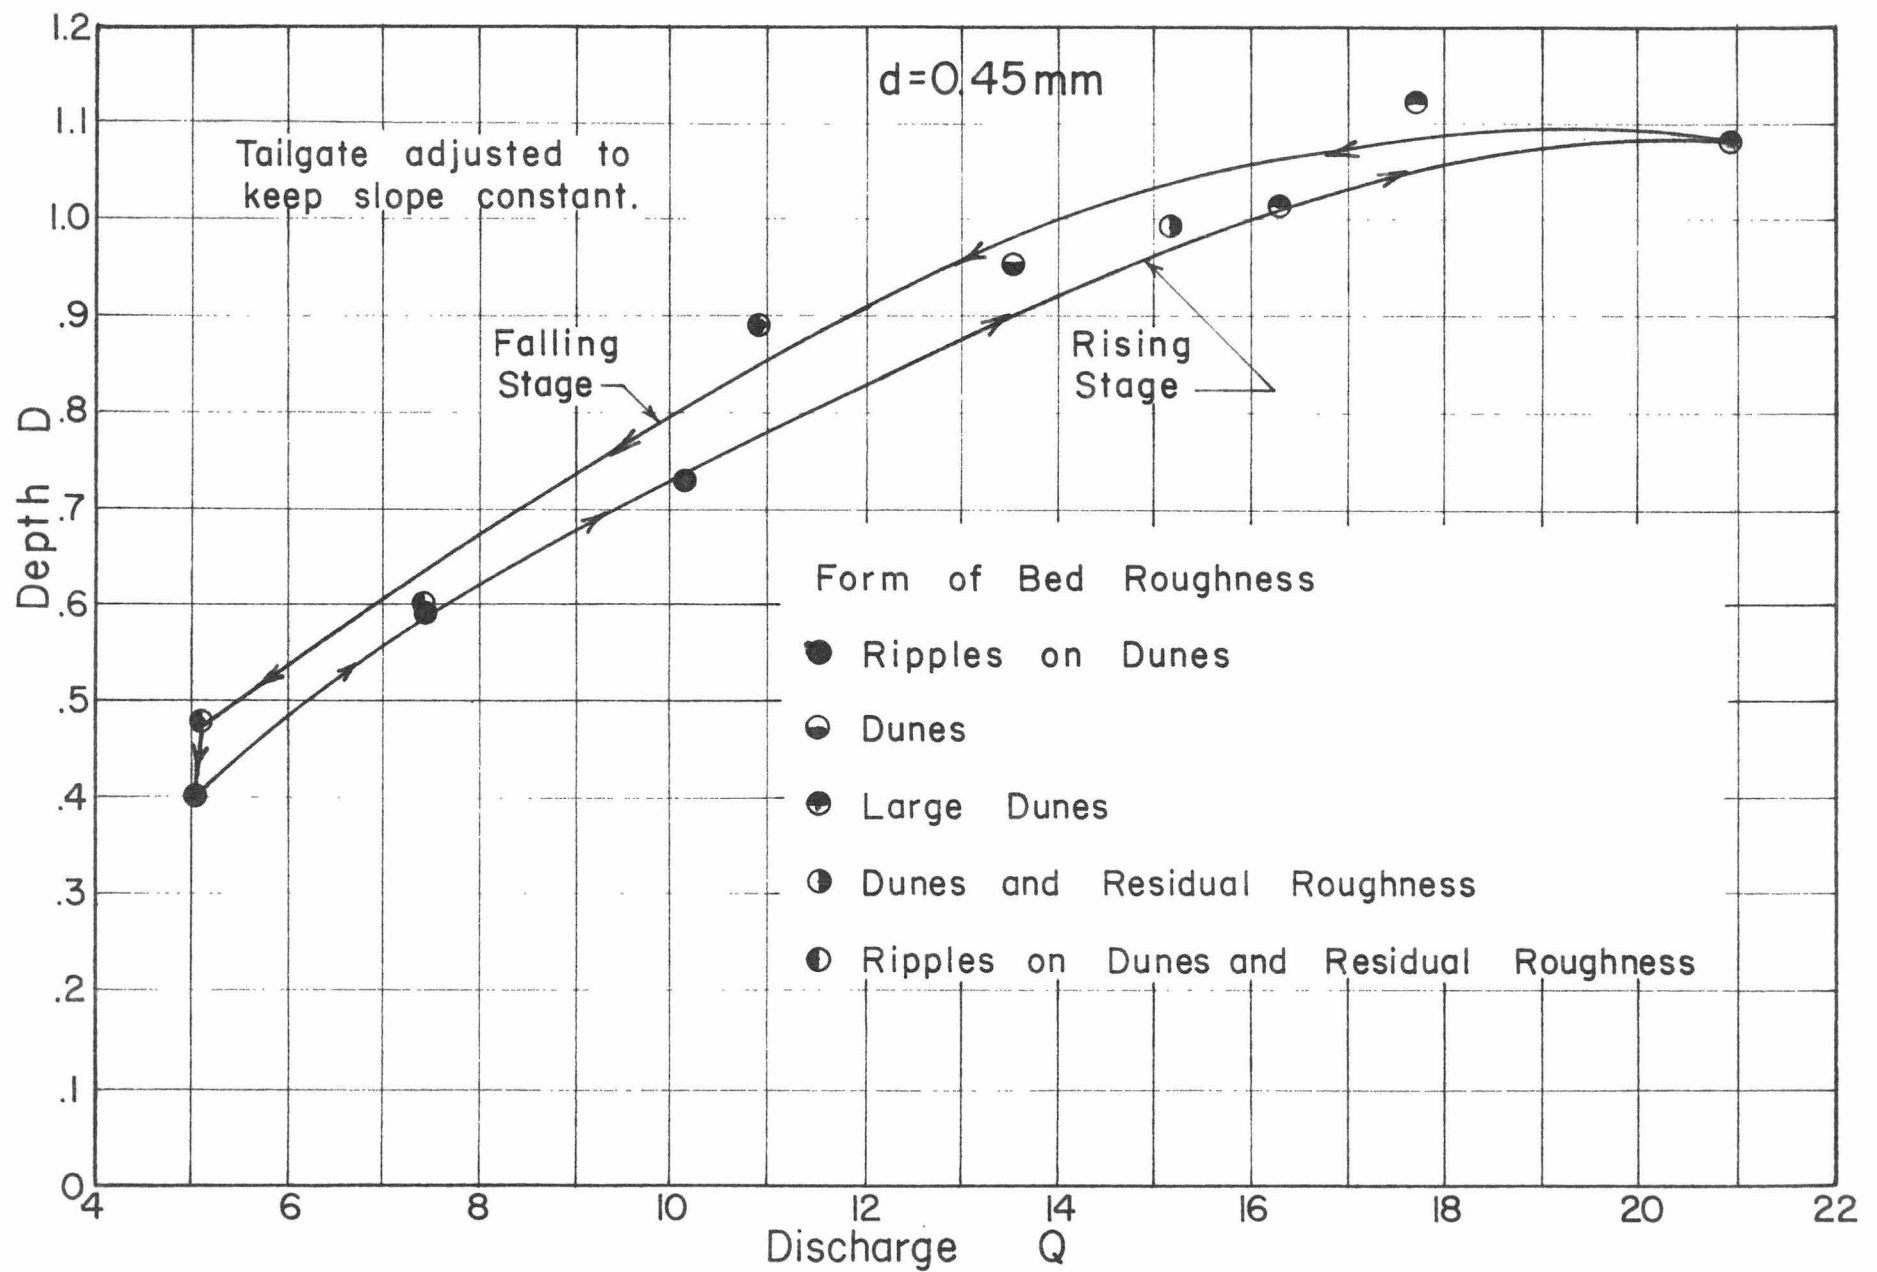


Fig. 5 Tranquil Flow Depth-Discharge Relation with Constant Channel Slope

were such that the slope was held nearly constant throughout the duration of the run. The initial discharge of 5.04 cfs was set up 12 hours prior to the beginning of the run in order to start with stable channel conditions. The initial form of bed roughness, at minimum discharge, was small dunes with ripples superposed. As the discharge rate was increased, the ripples were gradually eliminated and larger and larger dunes were developed by the flow. At the peak discharge of 20.96 cfs, the form of bed roughness was large dunes. After reaching maximum discharge, the flow was reduced in steps to produce a nearly symmetrical variation of discharge with time as illustrated in Fig. 4. It is of interest to note that the depth-discharge curve for the rising stage flow is lower than the depth-discharge curve for the falling stage flow. This situation can be explained in terms of the bed roughness and how it changed with discharge and time. On the rising stage, the development of maximum roughness lagged the increase in discharge. That is, the type of bed configuration consistent with a particular discharge did not have time to fully develop before discharge was increased again. The net result was that the resistance to flow on the rising stage was lagging the increase in discharge, and depth was less for a given Q than it would have been if equilibrium had been established. The opposite condition prevails for this run on the recession side. That is, when discharge was decreased, the flow could not fully alter the large dunes to smaller ones required for equilibrium in the limited time available. The net result was that the channel was rougher and the depth was greater than should have been for a given discharge and the recession curve of the depth-discharge relation was above the rising curve of the same relation. It should be noted that a few hours after the run was completed, discharge at its original magnitude, the depth returned to its original value observed at the start of the run.

The magnitude of the spread between the two branches of the depth-discharge relations is dependent primarily on variation of roughness which is influenced by rate of change of discharge with time, the characteristics of the bed material, and to a limited extent, on sediment transportation and other variables which are discussed later. If the rate of change of discharge with time is large, the spread between the two branches of the stage-discharge curve may be large or relatively small. If the rate of change of discharge with time is very small, the spread between the two branches will be small. At some intermediate rate of change of Q with respect to time, the spread between the two curves will be maximum.

The size of the bed material is an important variable because with fine sand, the rate of change of bed configuration with time is faster than for a coarse sand, and the break in the rating curve occurs at smaller shear. Hence, the spread between the rising and falling curves of a depth-discharge relation for a fine sand can be larger or smaller, and the break in the rating curve develops earlier, considering a particular run than for a coarse sand.

TRANQUIL FLOW RUN, CHANNEL SLOPE VARYING WITH DISCHARGE

Another depth-discharge relation for the type of run illustrated in Fig. 4 is presented in Fig. 6. There was no tail gate control at the end of the flume, slope of energy gradient varied directly with discharge, and the median diameter of bed material d was 0.28 mm. As before, on the rising stage curve the development of resistance to flow lagged the increase in discharge. On the falling stage, the rising stage curve held near peak discharge after which the recession curve was above the rising depth-discharge relation. This latter condition indicates an excessive resistance to flow caused by residual bed roughness. That such was probably the case, can be verified

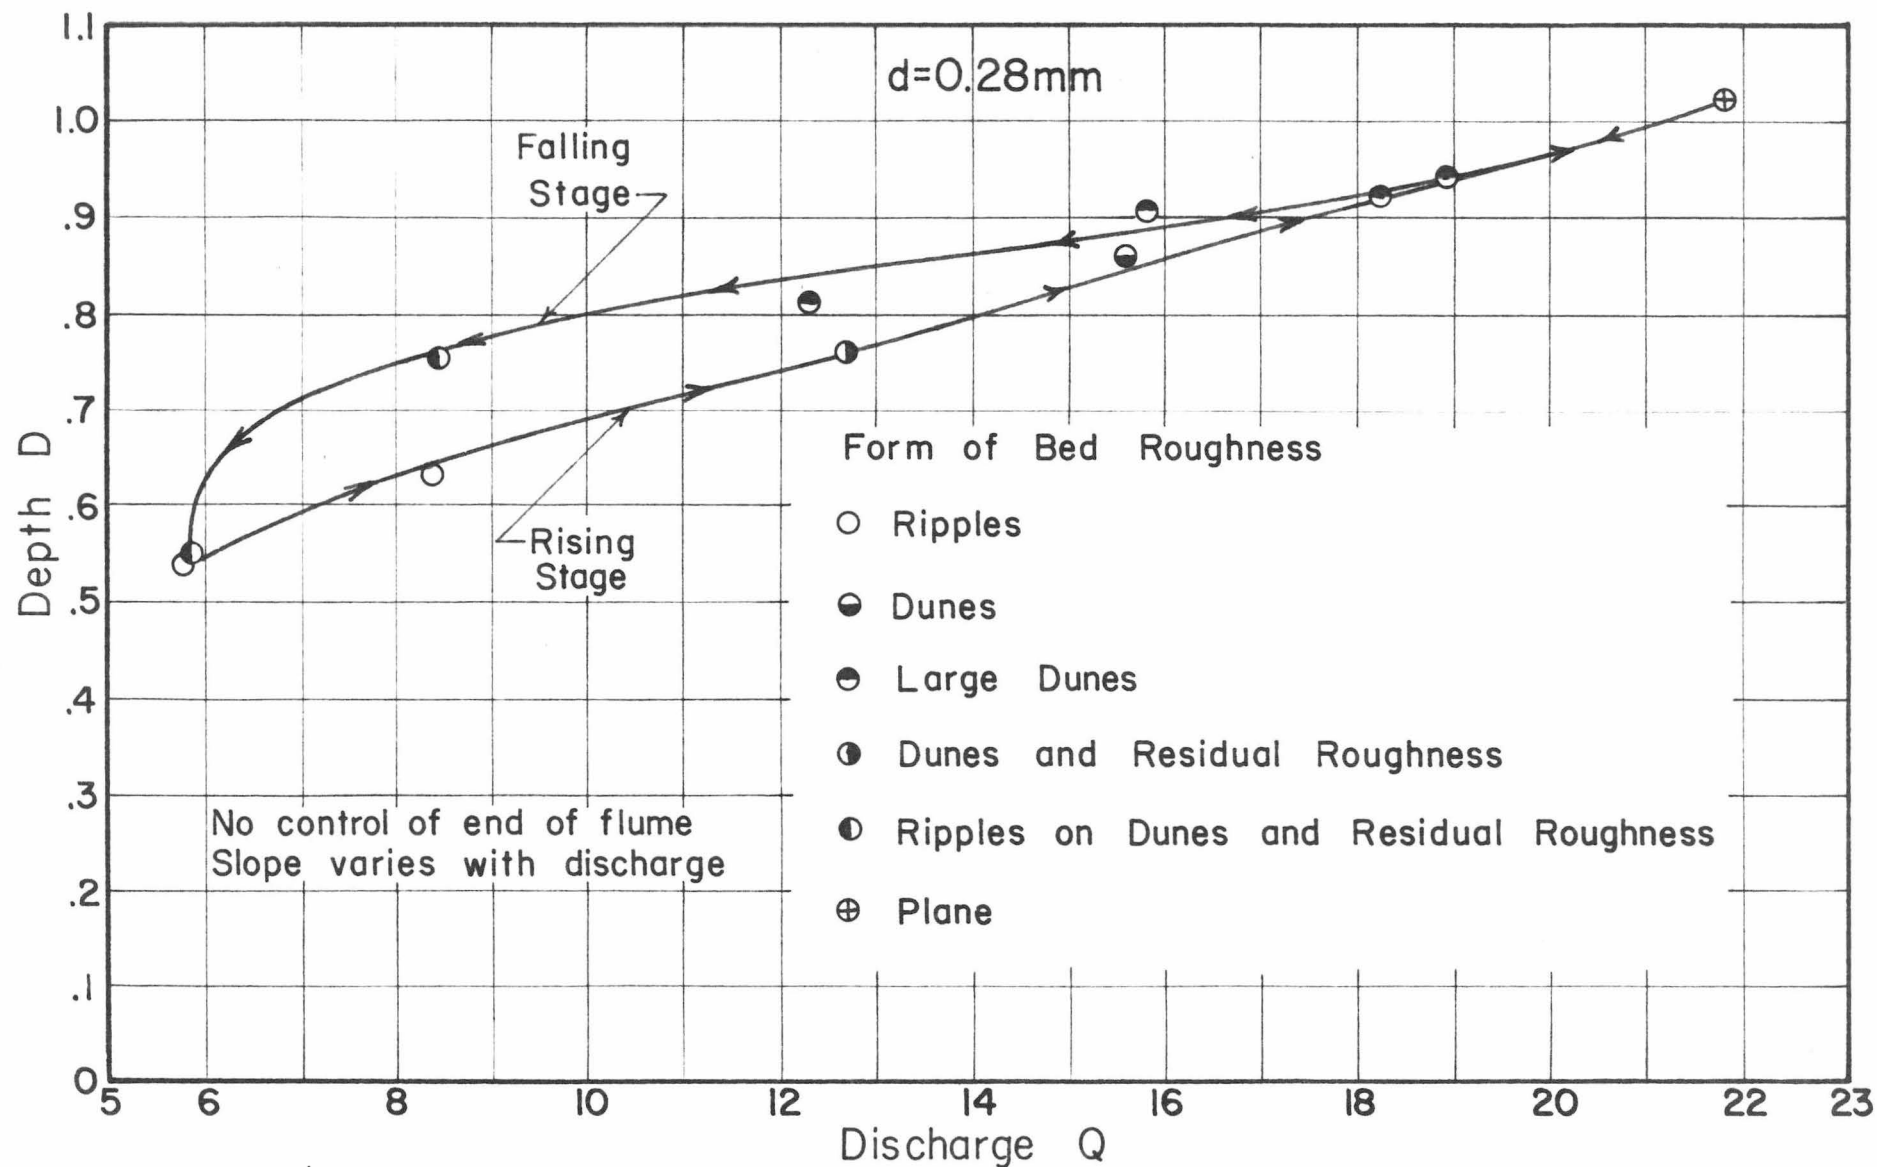


Fig. 6 Tranquil Flow Depth-Discharge Relation
with Channel Slope Varying with Discharge

by considering variation of form of bed roughness with discharge. As indicated in Fig. 6, at minimum discharge the initial bed roughness was ripples. As discharge was increased, the bed form changed to: ripples superposed on dunes, large dunes, and finally a transition condition which was nearly a plane bed developed. On the falling stage, the bed roughness was first modified from the transition condition back to large dunes. With further reduction in discharge, the resistance to flow was greater than normal due to the residual dunes. At minimum discharge, the bed roughness was ripples superposed on small dunes and residual dunes. The minimum flow was maintained for a period of 12 hours beyond completion of the 8 hour run. At the end of this time, the residual dunes had disappeared and the rising and falling stage curves coincided giving the closed loop depth-discharge relation presented in Fig. 6. It is important to note near maximum discharge, that after the change from dunes to transition, the depth-discharge curve was the same for both the rising and falling stage.

TRANQUIL AND RAPID FLOW RUN, SLOPE

VARYING WITH DISCHARGE

The physical conditions associated with this run were the same as described for Fig. 6 except channel slope was steeper. Referring to Fig. 7, the initial bed roughness at the beginning of the run (stable flow) was dunes with ripples superposed. As the discharge was increased, ripples were eliminated and larger dunes developed. With further increase in discharge, the transition from dunes to plane bed developed followed by a plane bed condition. The curve connecting the points for the plane bed condition was displaced appreciably from the rising stage curve for ripples superposed on dunes and dunes. That is, the change in resistance to flow which occurred as a form of bed roughness changed from dunes to plane bed caused a significant break in the rating curve. This break in the depth-discharge curve is

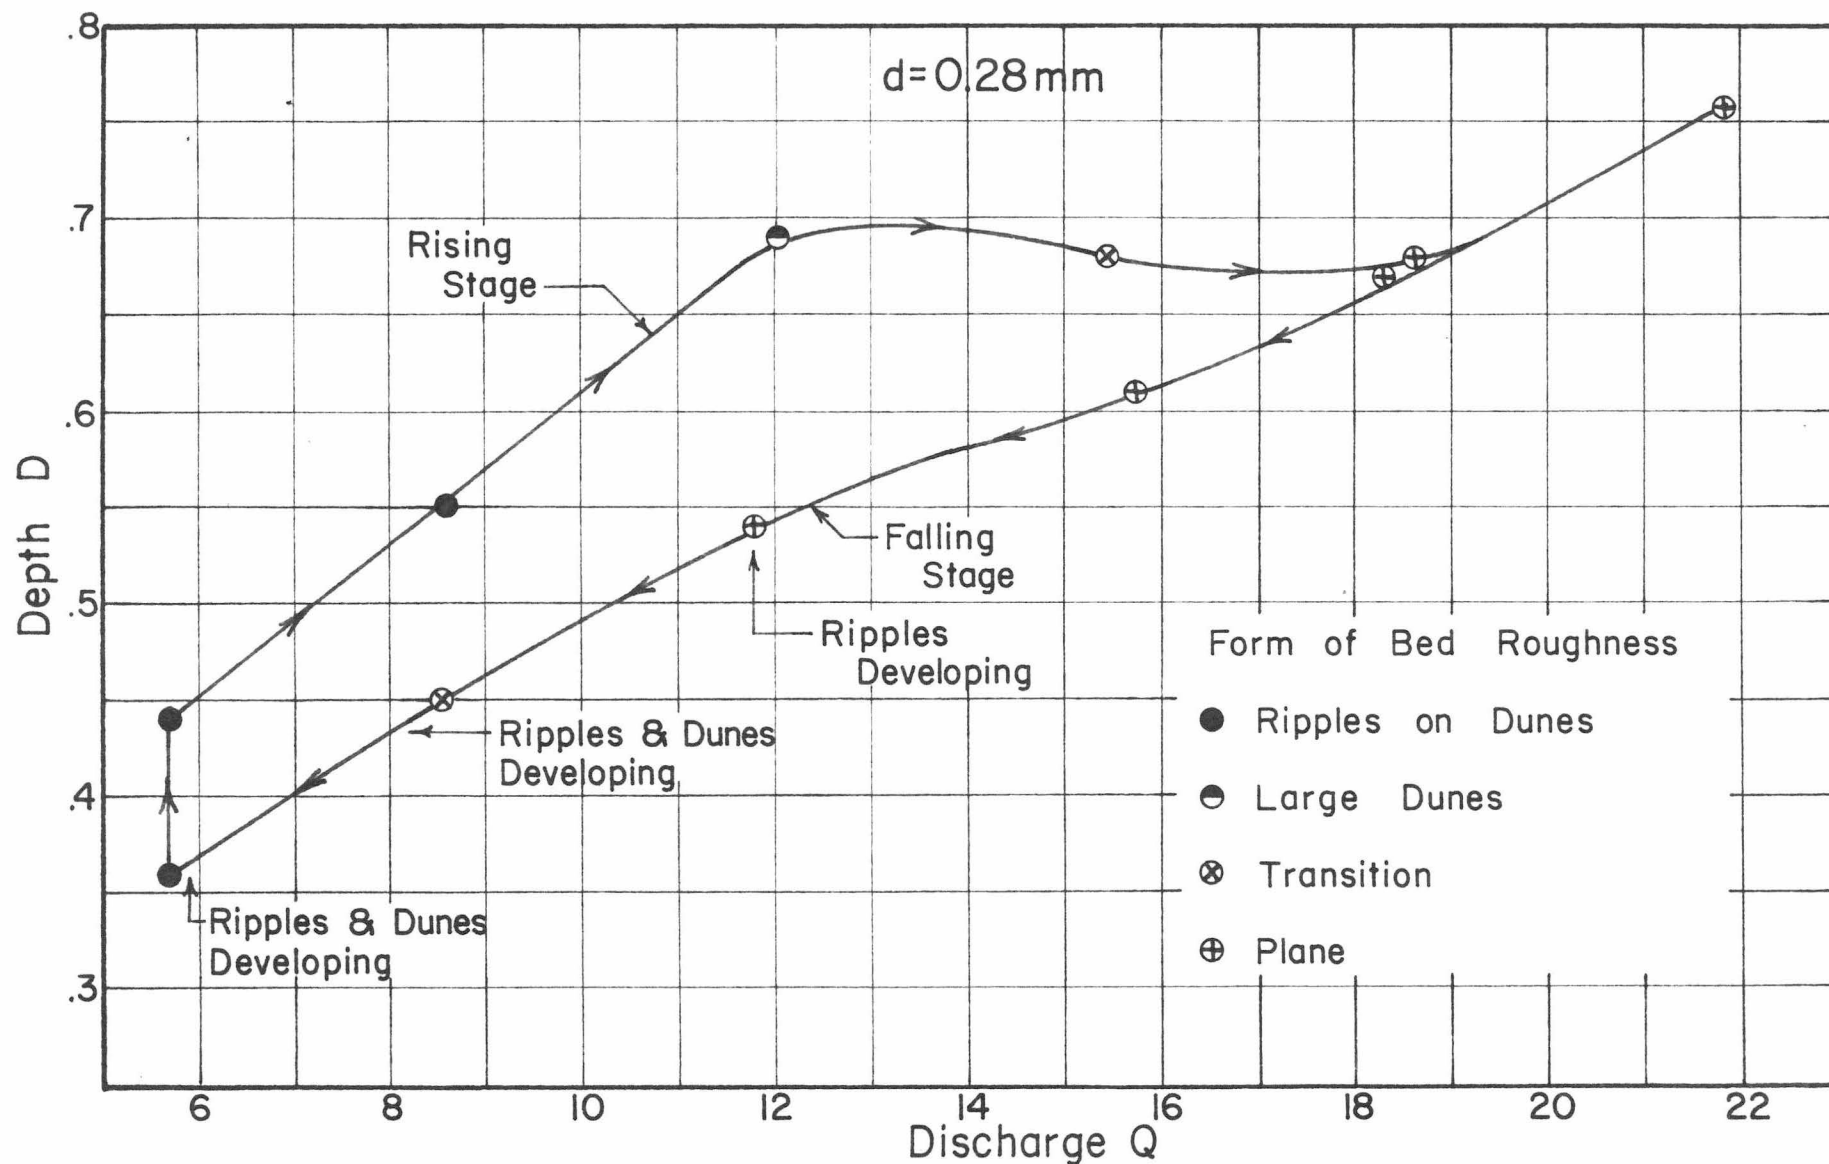


Fig. 7 Rapid and Tranquil Flow Depth-Discharge Relation, Slope Varying with Discharge

typical of the breaks in the stage-discharge curves of most alluvial channels in which the form of bed roughness changes from ripples and/or dunes to plane bed and/or rapid flow.


The curve representing the falling stage condition shows that there is a common curve for rising and falling stage with plane bed and/or rapid flow. However, it is of interest to note that the change from dunes to plane bed takes place at a larger discharge on the rising stage than the change from plane bed to dunes on the falling stage. In fact, in this case, it was difficult for the bed to change from a plane to dunes in the time allowed between changes in discharge. That is, dunes and ripples never developed on the falling stage to the extent which they did on the rising stage. Hence, resistance to flow and depths were smaller for small discharges on the falling stage than they were for corresponding discharge on the rising stage. Note that the reverse condition was true in Fig. 5 and Fig. 6. However, the foregoing condition could be reversed by using a longer time period between changes in discharge. That is, if rate of change of discharge with respect to time was decreased. Under this condition, dunes would have had time to develop and the rising and falling stage curves in the ripple and dune range of bed roughness would be closer together. In fact, if the rate of change of discharge was much slower on the falling stage than on the rising stage, the falling stage curve would probably cross and be above the rising stage curve. Thus, rate of change of Q with respect to time plays an extremely important role in defining shape of the depth-discharge relation. At minimum discharge, at the end of the run, the point on the falling stage curve was considerably below the corresponding point for equilibrium conditions on the rising stage. Holding discharge constant, this point moved vertically upward with time until, when equilibrium conditions were again reached, the two points were superposed.

RAPID FLOW RUN, $Fr > 1$

The most simple form of stage-discharge curve in alluvial channels exists when considering streams in which the shear is too large for dunes to form. This condition was investigated in the laboratory using a sand bed with a median diameter of 0.45 mm. The resultant depth-discharge curve is presented in Fig. 8. At minimum flow on the rising stage, the bed roughness consisted of plane bed, standing waves, and very limited antidune activity. As discharge was increased, the antidune activity increased until at peak discharge there was very strong antidune activity. On the falling stage, the process reversed itself. That is, antidune activity diminished to the original plane bed, standing wave, and mild antidune condition. There is no break in this rating curve. The rising stage and falling stage points, excluding error in measurement of depth, fall on a common curve. This indicates that depth-discharge curves for field conditions should be reasonably accurate when the bed shear is large enough that dunes have been eliminated. This accuracy of the depth-discharge relationship in rapid flow is also illustrated in Fig. 9 after the break occurred. With finer sand ($d \leq 0.3$ mm) there was a relatively rapid increase in resistance to flow with increasing Froude number in the rapid flow regime. This may increase the scatter in the depth-discharge relation for the finer sand in this regime.

TRANQUIL AND RAPID FLOW RUN, SLOPE VARYING WITH DISCHARGE

The conditions for this run were similar to those which yielded Fig. 7 except that the size of the bed material was coarser having a median diameter of 0.45 mm instead of 0.28 mm. There was no control at the tail gate, and the

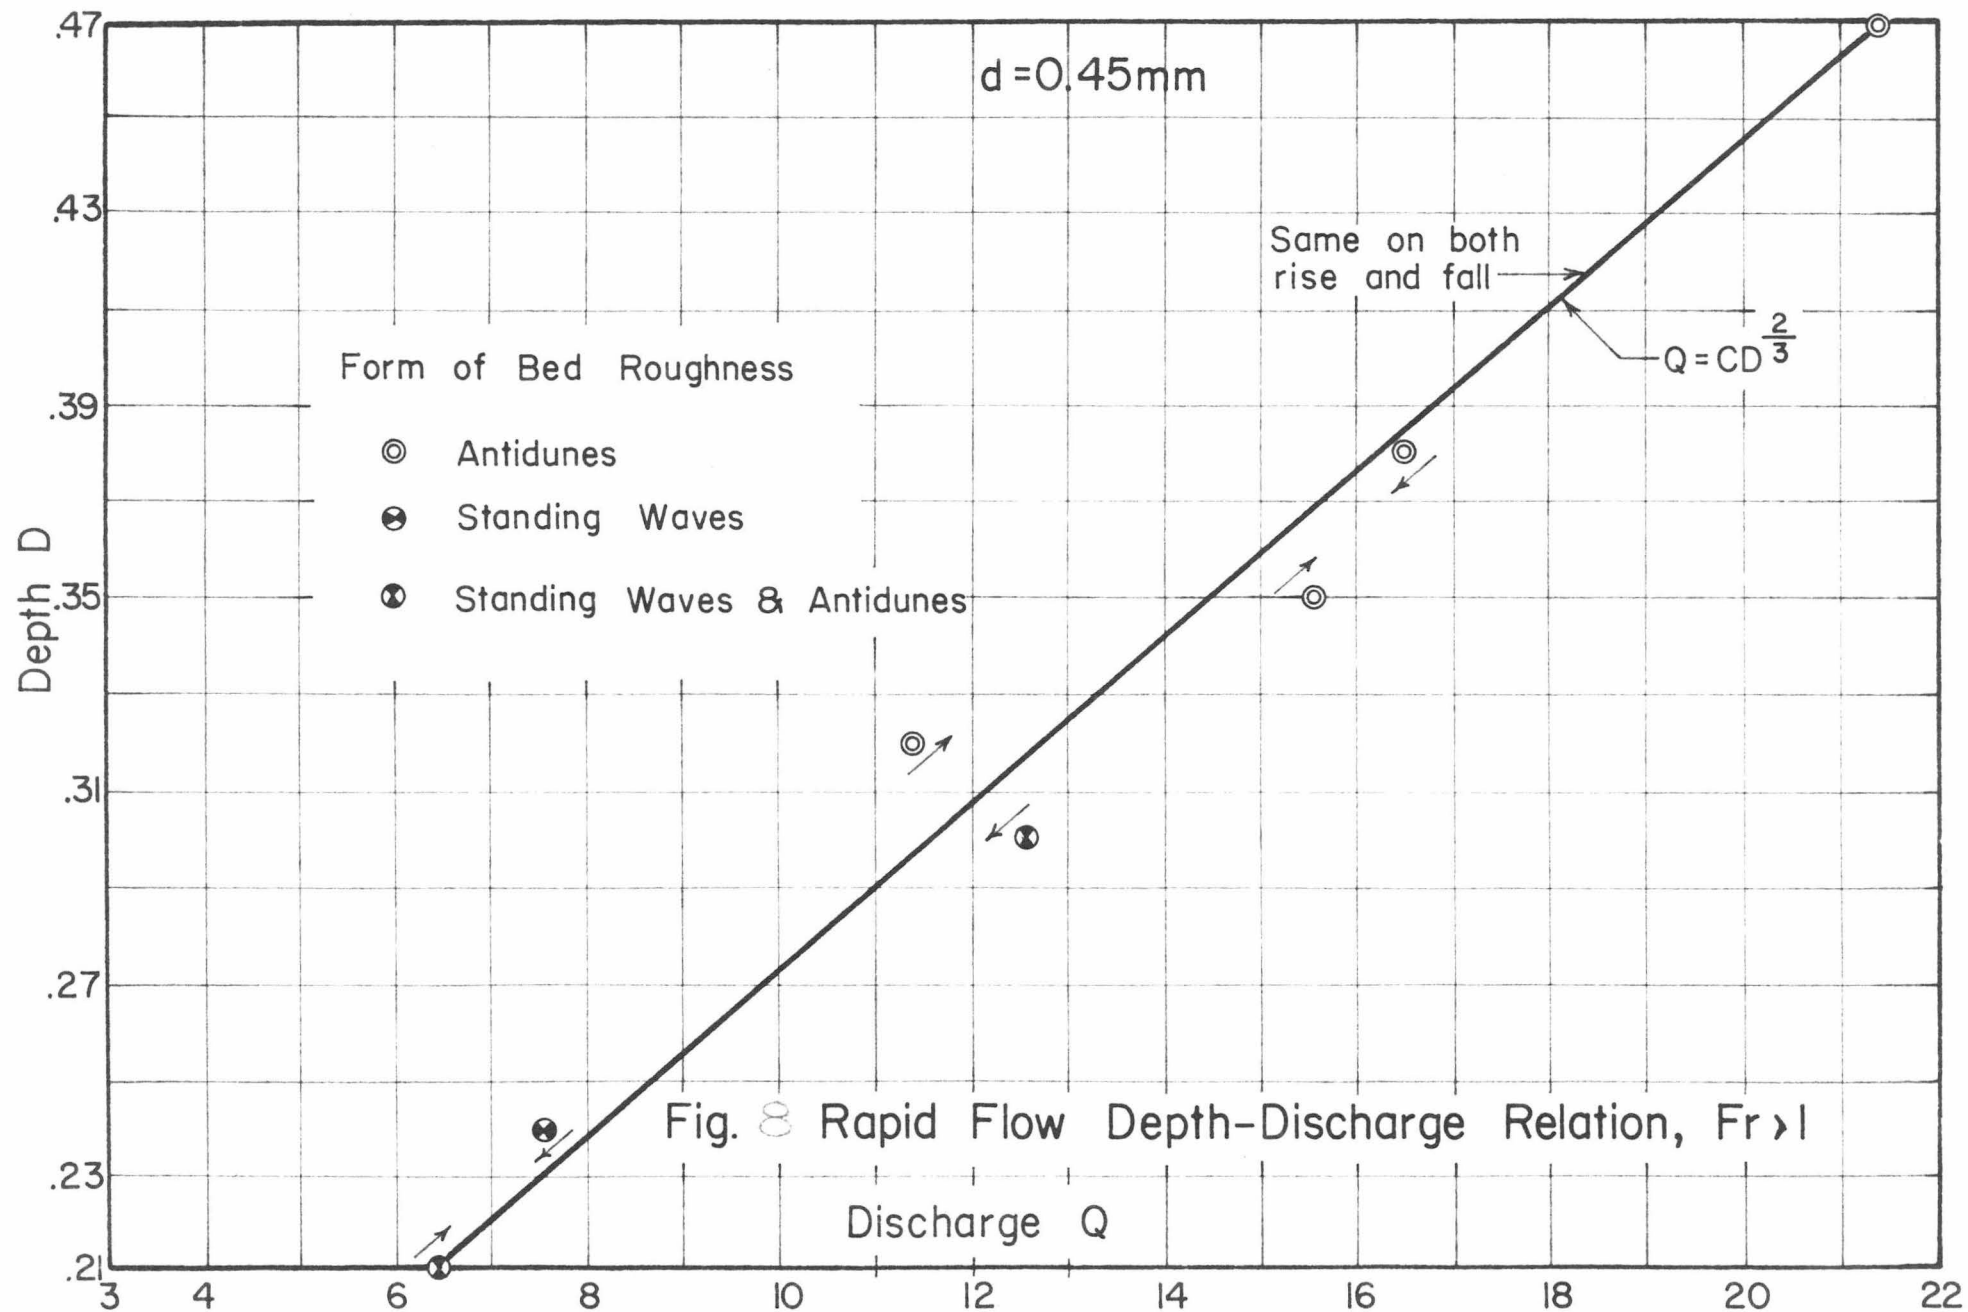

variation of discharge with time was essentially symmetrical as illustrated in Fig. 4. In Fig. 9 at the beginning of the run, the bed configuration was regular dunes of medium amplitude. As the discharge was increased, large dunes, transition, and finally standing waves developed. As the form of bed roughness changed from dunes to standing waves, a significant break developed in the depth-discharge curve. To the right of the break in the rapid flow range, the rising and falling stage relation can be represented by a single curve. This portion is similar to the depth-discharge relation illustrated in Fig. 8, and the portion of Fig. 7 to the right of the loop. With falling stage in the vicinity of and immediately to the left of the break in the rating curve, dunes were reforming; but size of dunes and, hence, magnitude of resistance to flow was less than for comparable discharge on the rising stage. With further reduction of discharge, dunes developed to the point where at a still smaller discharge, a residual dune effect was apparent. That is, dunes remained which were larger than they were for comparable discharge on the rising stage curve; hence, the falling stage relation crosses the rising stage relation and remains above it because of this extra resistance contributed by the residual dunes. At the termination of the run, the point on the falling stage curve continued to drop with time until it matched the initial point on the rising stage curve completing the loop as shown. Again the falling stage curve at the end of the run returned to the initial point after the run had been continued for a period of time. The significance of this return to the original conditions after completion of the runs (Fig. 6, 7, and 9) indicates the accuracy of the data and the ability to accurately repeat an equilibrium run.

This depth-discharge curve again emphasizes that size of bed material and rate of change of discharge with time are closely related to the shape of the depth-discharge relation in the ripple and dune range of bed roughness.

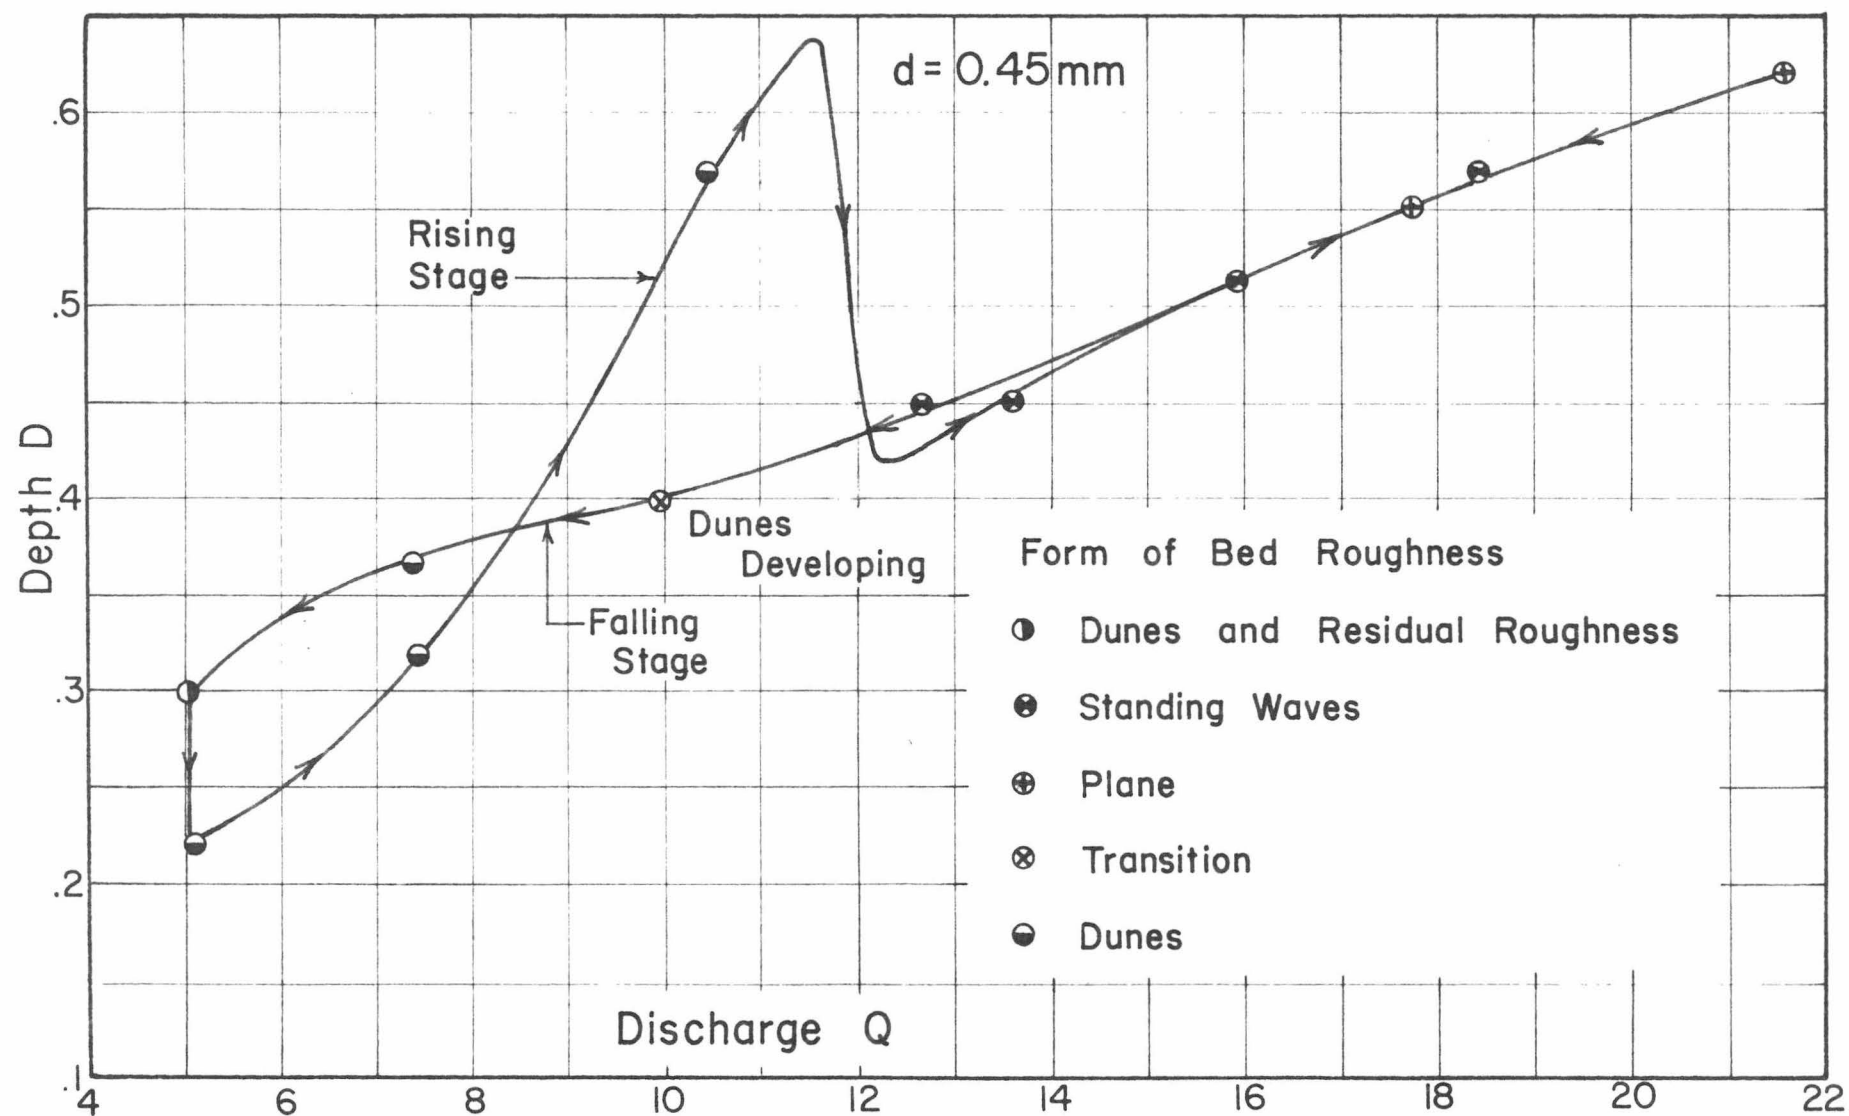


Fig. 9 Rapid and Tranquil Flow Depth-Discharge Relation, Slope Varying with Discharge

Thus, an infinite number of possibilities exist in the ripple-dune range. If the rate of change of discharge with time was faster, the falling stage curve might not cross the rising stage curve at all; or if the rate of change of discharge was very slow, the falling stage curve would cross the rising stage curve at a larger discharge. Similarly, if the rate of change of discharge on the rising stage was different, the position of this curve would be changed; and for a different size of bed material, the break in the rating curve would develop at a different discharge.

RAPID AND TRANQUIL FLOW RUN

SLOPE VARYING INVERSELY WITH DISCHARGE

To further illustrate the numerous types of stage or depth-discharge relations which are possible in alluvial channels, consider the situation where there was a channel constriction at the end of the flume. The channel slope and size of constriction were of such a nature that at small discharges flow was rapid; and as discharge was increased, the constriction caused tranquil flow conditions to develop. The depth-discharge relation for this condition is illustrated in Figure 10. At the beginning of the run, equilibrium condition, flow was rapid. There were small standing sand and water waves as well as antidunes. As discharge was increased, the magnitude of the Froude number soon began to decrease because of the backwater effect of the constriction; dunes began to develop. With still further increase in discharge, large dunes developed and this bed configuration existed at maximum discharge. As magnitude of discharge was decreased, large residual dunes persisted which caused a greater resistance to flow on the falling stage than that which existed at the same discharge on the rising stage. With further reduction in discharge, the backwater curve effect reduced and the Froude number increased until the transition condition (washed out dunes) developed.

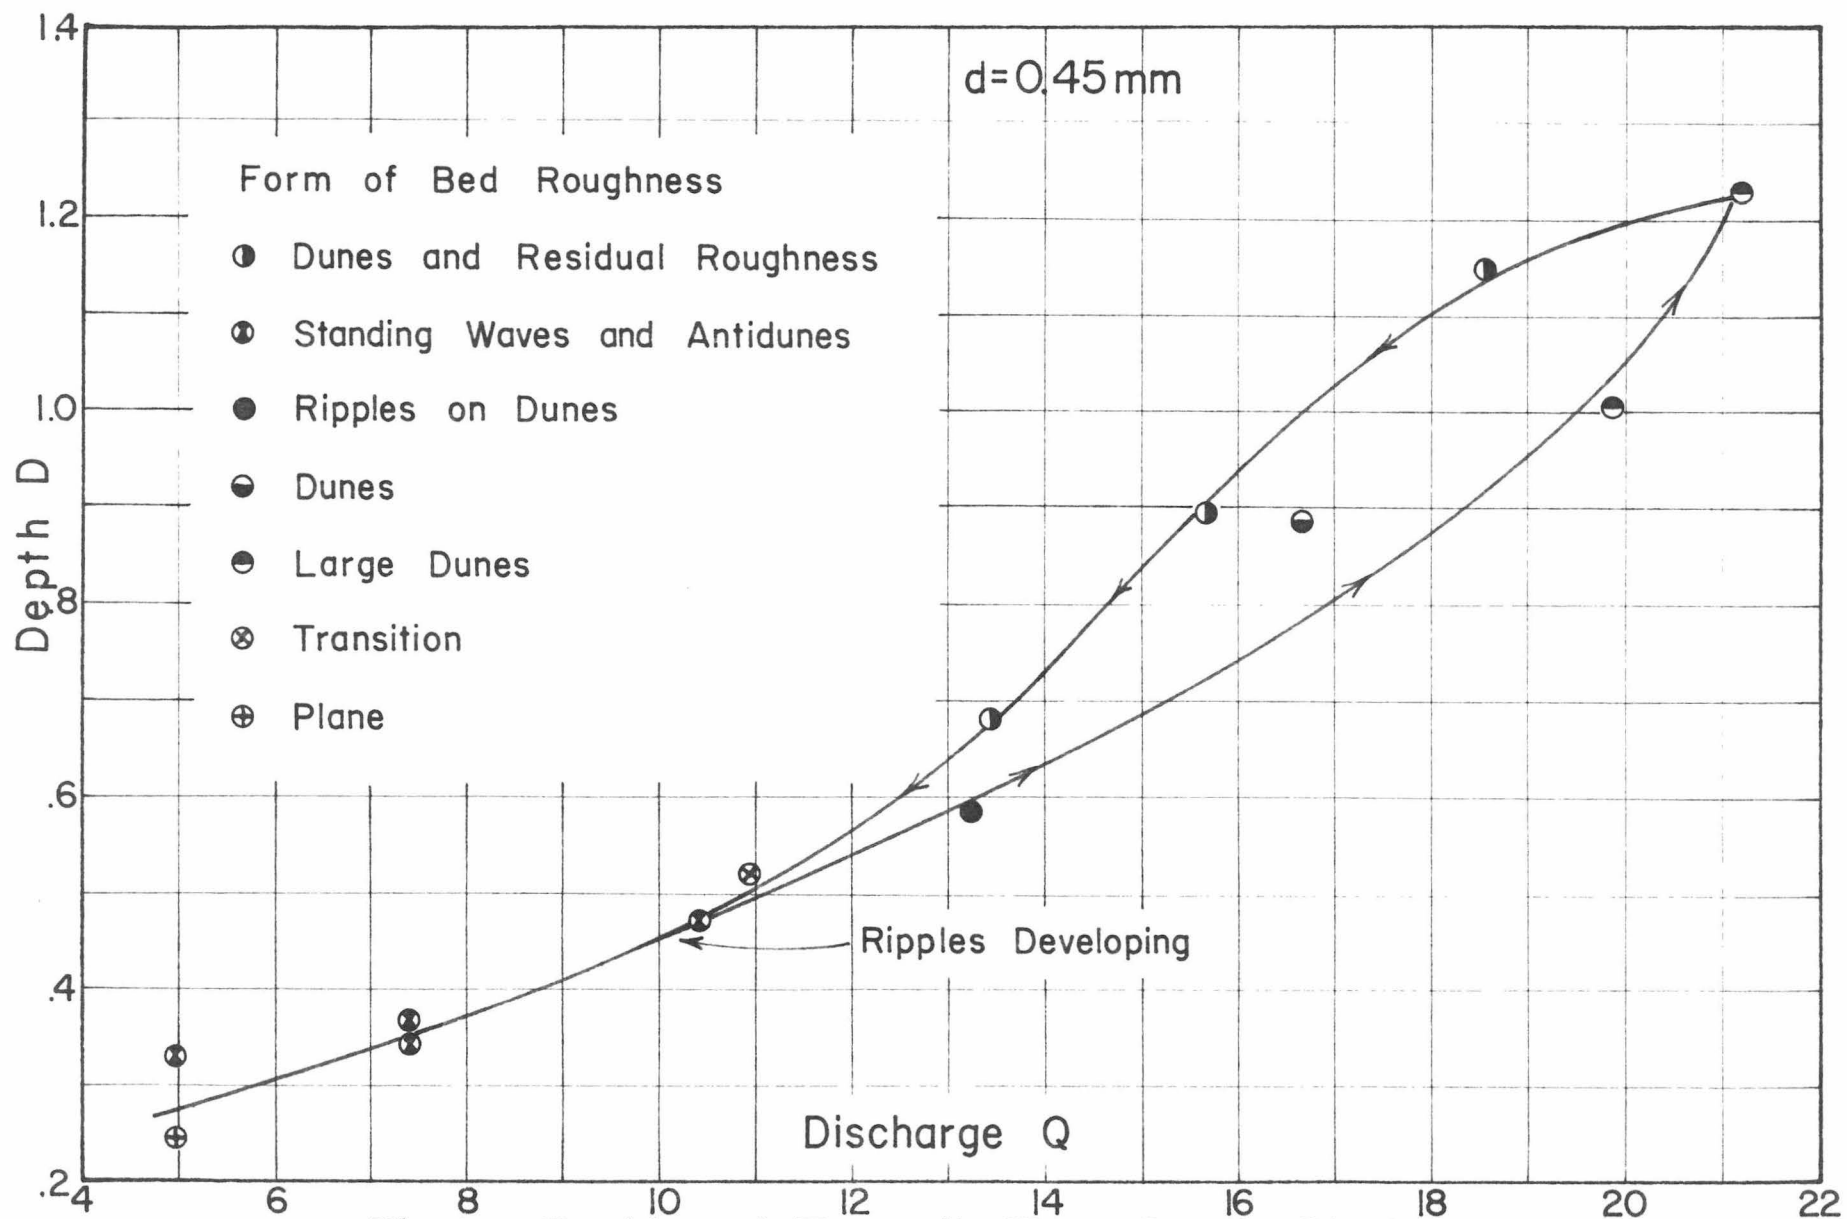


Fig. 10 Rapid and Tranquil Flow Depth-Discharge Relation, Slope Varying Inversely with Discharge

With still further reduction in discharge, the Froude number became greater than unity and rapid flow developed with standing sand and water waves and some antidune activity.

The depth-discharge relation of Figure 10 is practically the reverse of the ones illustrated in Fig. 6 and 7.

As with the other depth-discharge relations presented herein, the form of the curve or curves is intimately related to the rate of change of discharge with time and the size and gradation of the bed material. Except in the rapid flow regime, the depth-discharge relations can only be identical for runs and physical conditions which are identical.

OTHER FACTORS WHICH INFLUENCE DEPTH AND STAGE-DISCHARGE RELATIONS

Thus far, the importance of the physical conditions existing in a channel including the rate of change of discharge with time and the characteristics of the bed material on depth and stage-discharge relations have been emphasized. There are other factors which can be of at least minor importance; such as, bank vegetation, scour and/or fill, the bulking or consolidation of the sand bed due to the form of bed roughness, and wind action. These additional factors will be considered qualitatively.

It is a matter of fact that the presence of bank vegetation which trails in the water cross section and/or aquatic plants can appreciably increase resistance to flow in natural channels. In view of this, it is suggested that the presence of vegetation in an alluvial channel can delay the break in a rating curve and even eliminate it in some cases. It can also change the spread between rising stage and falling stage curves within the tranquil flow regime. For example, the channel vegetation presents a large resistance to flow on the rising stage causing greater than normal depth until the vegetation is plastered down by the action of the water=

sediment complex. Then on the falling stage after the plastering down and the possible removal of some vegetation, the resistance to flow is relatively smaller. Considering the super-positioning of a vegetation effect on the stage-discharge relation of Fig. 6, it is conceivable that the spread between the two curves would be reduced and certainly it would be at least slightly changed depending on the characteristics and behavior of the vegetation.

Under certain physical conditions, the reach for which a stage-discharge relation is being developed may tend to scour or aggrade during a flood. This change in bed elevation naturally effects the stage-discharge relationship. Also, the resultant change in bed elevation can influence bed roughness and the depth-discharge relation for the reach. Consider, for example, Fig. 9. In this case, the stream has a relatively large capacity to transport sediment per unit of flow at small discharges. As Q increases, the backwater effect develops and reduces the transport capacity in the backwater area. That is, a large sediment load is being carried into a reach of reduced slope and velocity; as a result, the bed of channel begins to aggrade seeking a new equilibrium level. On the rising stage, the bed level increases with time, and on the falling stage, it continues to rise with time at a diminishing rate until the backwater effect is eliminated. At this time, because of the aggraded bed, a steeper than normal channel slope can exist in the reach causing a larger Froude number and increased sediment transport in the aggraded reach until the original equilibrium is restored.

The bed material of an alluvial channel is fairly loose and soft when ripples exist. It becomes even softer and bulks to an even greater extent as dunes develop. When the transition stage is reached (washed out dunes), the bed begins to firm up. Its weight per unit volume increases. With further increase in shear, the bed continues to become firmer until with

plane bed and/or standing sand and water waves, the bed has a maximum density. With still further increase in shear, antidunes develop. As larger and more violent antidune action occurs, the bed density may decrease slightly. This variation in density with bed configuration causes minor changes in bed elevation which can, at least slightly, effect stage-discharge relations. This concept is applicable to all breaking stage-discharge relations but can have only a very minor effect when confined to ripple and dune type configurations in the tranquil flow regime. By working with depth instead of stage, this effect is automatically eliminated. In most cases, it is quite difficult to measure and record depth, but this problem may be eliminated in most cases by using a sonic depth sounder to record bed elevations. A sonic depth sounder developed by Richardson, Simons, and Posakony (1959) can be modified so that it will measure and record depth of flow.

Depending on the way in which the wind is oriented with respect to the reach of channel in question the resistance to flow may be increased or decreased and in every case, channel stability is decreased. Wind in the opposite direction to flow can increase resistance to flow on the order of ten per cent. Wind in the direction of flow slightly decreases resistance to flow. Wind in either direction causes instability of banks because of the wave action it generates and reduced the stability of bed material by causing seepage forces. It has been qualitatively verified by Simons (1955) that wind generated water surface waves can reduce the effective weight of bed material by as much as twenty per cent as a result of the additional tractive force exerted on the bed material due to the water waves and seepage forces set up in the bed due to change in elevation between wave crests and troughs.

As in the preceding cases, because the wind action can effect the stability of the bed material and change the resistance to flow, it is anticipated that wind action can also effect the stage-discharge relations.

CONCLUSIONS

The resistance to flow in an alluvial channel under all conditions of flow, is intimately related to the form of bed roughness. In turn, the form of bed roughness varies with such factors as:

1. The magnitude of the shear force exerted by the water on the bed.
2. The characteristics of the bed material.
3. The fine sediment load.
4. Seepage forces caused by flow through the bed and bank material.
5. Temperature.

As the form of bed roughness changes the magnitude of the resistance to flow can change as much as 300 per cent. For example, considering flume conditions and a dune bed configuration, the Manning n can be as large as 0.035 but by slightly increasing shear, the dunes vanish and a plane or standing wave condition results which can have a Manning n as small as 0.012.

The large changes in resistance to flow which occur as a result of changing the form of bed roughness influences the form of the stage or depth-discharge curves for alluvial channels.

There are, in general, three types of stage or depth-discharge relationships for alluvial channels. If the bed form always consists of some combination of ripples, dunes, or washed out dunes regardless of variation in discharge; then consecutive measurements of stage or depth and discharge made during one flood, when plotted, will loop or even cross forming two loops. That is, the depth for a given discharge on the rising stage will

usually be larger or smaller than the depth at the corresponding discharge on the falling stage. These loop rating curves for rising and falling stage conditions are infinite in number for a given reach of channel. Each new flood yields a new set of curves unless the flows and channel conditions are identical. Hence, accurate depth or stage discharge relationships under these conditions do not exist.

The reason for the loop or multiple loop stage discharge curve is that the formation and alteration of roughness elements for each change in shear, with the increase or decrease in depth, will lag the change in

depth. For instance, on a rising stage the dunes do not increase in size at a rate corresponding to the rate at which the discharge and shear are increasing. Consequently, the resistance to flow will be less than under equilibrium flow conditions. Whereas, on the falling stage, the rate of decrease of the large roughness elements formed at the higher stage, residual roughness, is lagging the decrease in discharge and the resistance to flow is larger than it would be for equilibrium conditions. Thus, the rising stage curve is lower than the falling stage curve, in this instance.

The reverse situation, where the rising stage curve is above the falling stage curve can also be explained in a similar manner by the lag in the change of resistance to flow with respect to change in discharge. However, in this case the resistance to flow is larger on the rising stage than on the falling stage.

The shape of the loop curves depends on the form of bed roughness which forms under equilibrium conditions for a given depth, the amount of time it takes for the bed roughness consistent with equilibrium conditions to form, and the amount of time available for the bed to adjust before the depth changes as a result of additional change in discharge. The above three factors are determined primarily by the energy gradient, effective size of the bed material, and the rate of change of discharge with time.

The second type of stage or depth-discharge curve occurs when the bed form is always plane, standing waves, or antidunes regardless of the discharge. In this case, the slope of the energy grade line is steep enough and the shear large enough for the effective size of the bed material which is involved that only these forms of bed roughness can develop. For these conditions, the depth-discharge curve is the same for both increasing and decreasing discharge and is stable, and reliable.

The third general relationship results when the shear varies over such a wide range that ripples and/or dunes form at small discharges, and plane bed, standing waves or antidunes form at large discharges. With these conditions, the lower portion of the depth-discharge relationship will be the same as the first type of general curve including all of its variability. Then, there will be a break in the relationship at some intermediate discharge which leads to the second type of curve. This break will be downward and to the right on a plot of depth vs. discharge because of the decrease in resistance to flow as the bed roughness changes. In accordance with the description of the type two curve, there is little variation in the depth discharge relationship after the break. However, where the break from a type one curve to a type two curve occurs, is variable for both rising stage and falling stage conditions. Where the break occurs in the relationship depends on rate of change of discharge with time and the characteristics of the bed material and may vary from rise to rise.

The form of the stage or depth discharge curves can be changed slightly, particularly the position of the point of discontinuity by:

1. The presence of seepage forces.
2. Large concentrations of fine sediment in the stream.
3. Wind action

4. Vegetation
5. Temperature change
6. Rate of change of stage with time.

With an understanding of the basic principles which cause the observed variation in stage-discharge relations, a more effective use of this relationship is possible.

Literature Cited

- Hubbell, D. W., and others, 1956, Investigations of some sedimentation characteristics of a sand bed stream: U. S. Geol. Survey open-file report, Lincoln, Nebraska.
- Richardson, E. V., Simons, D. B., and Posakony, G. J., 1959, Sonic depth sounder for laboratory and field use: Unpublished paper.
- Simons, D. B., 1955, Forces of wave motion which effect canal stability: Unpublished research paper, Colorado State University.
- Simons, D. B., and Richardson, E. V., 1959a, Forms of bed roughness in alluvial channels: Unpublished paper.
- Simons, D. B., and Richardson, E. V., 1959b, Sediment transportation in alluvial channels: Presented at A.S.C.E. Hydraulic Conference, Fort Collins, Colorado.
- Simons, D. B., and Richardson, E. V., 1959c, A study of roughness in alluvial channels, Flume studies using medium sand (0.47 mm) and bentonite clay (0.0005 mm); U. S. Geol. Survey Water-Supply Paper 1498B.
- Simons, D. B., Richardson, E. V., and Albertson, M. L., 1959, A study of roughness in alluvial channels, flume studies using medium sand: U. S. Geol. Survey Water-Supply Paper 1498A.
- Vanoni, V. A., and Brooks, N. H., 1957, Laboratory studies of the roughness and suspended load of alluvial streams: California Institute of Technology, Report No. E-68, Pasadena, California.