

TA7

C6

CER 56-17

copy 2,

330

REPORT OF
SEDIMENT LINING INVESTIGATIONS

FISCAL YEAR - 1956

By

R. D. Dirmeyer, Jr.



Department of Civil Engineering

Colorado Agricultural and Mechanical College
Fort Collins, Colorado

August 1956

ENGINEERING RESEARCH
SEP 10 '70
FOOTHILLS READING ROOM

CER No.56RDD17

REPORT OF
SEDIMENT LINING INVESTIGATIONS
FISCAL YEAR - 1956

By

R. D. Dirmeyer, Jr.



Department of Civil Engineering

Colorado Agricultural and Mechanical College
Fort Collins, Colorado
August 1956



U18401 0590811

CER No.56RDD17

Civil Engineering Department
Colorado A and M College
Fort Collins, Colorado

REPORT
OF
SEDIMENT LINING INVESTIGATIONS
Fiscal Year 1956

by
R. D. Dirmeyer, Jr.
Project Leader

Prepared for
Regional Director Region VII
Bureau of Reclamation, U. S. Department of Interior
under Contract No. 14-06-700-1157
through Colorado A and M Research Foundation

August 1956

CER No. 56RDD17

ACKNOWLEDGMENTS

Grateful acknowledgment is made to the U. S. Bureau of Reclamation for sponsorship of an important part of the research and development work summarized in this report. Many other organizations and individuals have also contributed generously their time, talents and money into the cooperative work described in this report. Thus, while it is impractical to acknowledge all contributions individually, this important help is most sincerely appreciated.

In the preparation of this paper, the following people have been particularly helpful: Colorado A and M College -- Civil Engineering Department -- D. F. Peterson, Head; M. L. Albertson, Professor; E. W. Lane, Professor; R. T. Shen, Technical Editor; D. L. Bender, Assistant Hydraulic Engineer; and E. C. Newman, Research Assistant; and U. S. Bureau of Reclamation -- P. W. Terrell and C. W. Jones, of the Chief Engineer's Office; and F. M. Roush of the Region 7 Office.

CONTENTS

<u>Chapter</u>		<u>Page</u>
I	INTRODUCTION	1
	Reasons for Research on Sedimenting	1
II	PREVIOUS WORK	3
	Silting	4
	Sedimenting	6
III	PRESENT RESEARCH AND DEVELOPMENT PROGRAM	8
	Field Installation Research	10
	Fundamental Research Problems	25
IV	CONCLUSIONS AND COMPARISONS	31
	BIBLIOGRAPHY	33

I. INTRODUCTION

Research and development work on the bentonite sedimenting technique of canal sealing has been actively carried on since July 1953. The work has been accomplished through the Colorado A and M Research Foundation with many cooperators, such as the U. S. Bureau of Reclamation and The Central Nebraska Public Power and Irrigation District. Since the work is still very much in an experimental stage, this yearly report of project activities is essentially of an interim technical report nature. It should be realized that most of the work -- especially the evaluations -- are not complete. Separate detailed reports are planned upon the completion of work in each major phase of the project program¹. This report, however, will provide an over-all picture of the sedimenting method and the research and development work to date.

Reasons for Research on Sedimenting

Seepage losses from irrigation canals constitute a serious problem in the United States and other parts of the world. It is noteworthy, however, that few irrigation groups are actually doing such canal lining work. This general lack of large scale lining programs becomes more understandable when the following factors are considered:

1. Miles of canal that need lining;
2. High costs of commonly accepted canal linings; and

¹ As of August 1, 1956, reports on the following subjects were in a final review and revision stage: (1) Dispersion Characteristics of Several Clay Minerals; (2) Results of Penetration and Sealing Studies, and (3) Results of Experimental Sedimenting Trials in Colorado.

3. Time required to install conventional linings.

For most operating irrigation organizations, the combination of the above problems has restricted canal lining to trouble-spot applications. This "piecemeal" approach seldom saves much water when considered as a percentage of the over-all distribution system losses. Therefore, a truly low-cost, mass-production method of canal lining or sealing is one of the more important needs of irrigated agriculture. The sedimenting method described herein is potentially such a method -- and it has the added advantage of being applied by flowing canal water.

II. PREVIOUS WORK

There are a number of important precedents for the sedimenting method, including:

1. Pervious materials, such as sands, have been sealed and cemented by geological processes involving the seepage injection of water-borne sediments.
2. Seepage from irrigation canals has been significantly reduced, both naturally and artificially, through the action of silt² sediments in the canal water.
3. The problems of canal seepage, bank erosion, and submerged water weeds have usually increased when the silt has been removed from the irrigation waters -- commonly as a result of storage in a newly constructed upstream, regulatory reservoir (13)³.

One important objective of sedimenting is to reproduce and improve the canal sealing effects of "silting", while excluding the undesirable effects an uncontrolled muddy water can produce in canals and on irrigated land. Because of this relation between the silting and sedimenting methods, both methods are briefly covered in the following review of previous work.

² Catch-all term -- generally means any sediment, ranging in size from sand to silt to clay.

³ Number in parentheses refers to the bibliographical entry.

Silting

Natural silting is as old as irrigation. It has been commonly noticed that muddy water seems to flow farther than clear water in ditches and on irrigated land. Usually, however, the disadvantages of a very muddy irrigation water, such as sand deposits requiring removal by cleaning operations, far overshadow the advantages. Frequently, the advantages go unnoticed until canal cleaning or construction of an upstream dam emphasizes that there have been, after all, some beneficial aspects to the muddy water.

For example, after Guernsey Dam was completed, the amount of sediment in the waters released to the downstream irrigated areas in eastern Wyoming and western Nebraska, was greatly reduced. The canal cleaning problems, which had been troublesome, were almost eliminated, but to offset this advantage, the canal seepage losses and the canal bank erosion seriously increased. The growth of submerged water weeds also appreciably increased in some reaches of canal.

In recent years the sealing effect of infrequent muddy flows in the Interstate Canal has been noted⁴. A slight mud content in the water (maximum of about 1000 ppm) will reduce the over-all losses in the Interstate Canal from about 600 cfs to 500 cfs. The normal maximum flow is about 2,100 cfs at the headgate. The sealing effect, however, is temporary, seldom lasting more than one week, or until the silt cake is eroded away.

⁴ Personal communication from Mr. G. H. Storm, formerly Superintendent, Pathfinder Irrigation District, Mitchell, Nebraska.

The introduction of an artificial sediment into flowing canal water has been tried on many irrigation projects -- perhaps at one time or another on all of them. While information relating to these trials is exceedingly meager, it does appear that the best results have been obtained when the sediment penetrated into the cracks or voids of the in-place canal bed materials. In several canals, good sealing results have been obtained with bentonite clay as the silting agent.

The common limitations of silting are, in effect, guideposts to avoid in the research and development work on the sedimenting method. Therefore, some of the more common limitations are outlined below:

1. Permeability of "silt" -- In some extreme cases, sandy to silty materials of a pervious nature have been used for "silting". However, due to flocculation problems and over-size particles, even the most favorable appearing clayey materials can produce relatively permeable and vulnerable "silt" layer linings.
2. Settling tendency -- When mixed in untreated canal water, most local clays will tend to settle to the canal bottom within a relatively short distance of flow, especially in a slowly flowing canal. Thus, almost all of the suspended load of "silt" may drop out in the first ponded reach of canal and not necessarily where the sealing is needed.
3. Lack of penetration -- Almost all natural clays contain some sand and silt-size particles. This is unfortunate since only a small percentage of over-size sediment

particles can produce a bridging action over the void openings of the pervious soils. Thus, the slower settling clay, which probably produces the main sealing effect, is commonly concentrated at the canal bed surface, where it is susceptible to erosion by water, puncturing by animals, deterioration by drying and cracking, or destruction by canal cleaning.

Sedimenting

In sedimenting, the sealing agent is stably dispersed; settling is virtually eliminated by one or a combination of methods, such as pre-settling, chemical dispersion, or by the turbulence of flowing canal water. By accomplishing this dispersion, the sedimenting action is automatically concentrated in only the leaky zones of the canal bed -- provided an adequate sealing-in-depth effect is being achieved.

The major previous work on the sediment lining method, as defined above, was accomplished by the U. S. Bureau of Reclamation on the Kendrick Project, near Casper, Wyoming (5).

Valuable information has been provided by the somewhat related uses of bentonite for water impedance work as follows:

1. A bentonite slurry was used in a reservoir sealing job in 1929 by Mr. C. H. Lee, Consulting Engineering for the San Francisco Water Board (12).
2. Model tests, involving the use of bentonite and water mixtures, were run during the investigations for the All-American Canal in southern California in 1939 (8).

3. Bentonite has been used for sealing canals and reservoirs as a buried membrane and as an admixture material for the pervious soils (9) (22).

4. Bentonite has been used as an additive for drilling fluids in oil well drilling since about 1921 (18) (15).

A partial search of the literature has revealed considerable information of a relevant nature. Literature relating to grouting applications and drilling mud control have been especially helpful.

LEGEND

1954 Installations

- △ E-65 Lateral (Mi 23.7 to 36.2), Tri-County Project, Nebr.
- △ Horse Creek Lateral (Mi 10.9 to 20.9), North Platte Project, Nebr.
- △ Lateral 128 (Mi 0.0 to 3.0?), Kendrick Project, Wyo.
- △ Lateral 4 (1 mile), North Poudre Irrigation Co, Colo.
- △ Little Cache Ditch (1.25 miles), near Fort Collins, Colo.
- △ Power Canal (mix and sediment test), near Sutherland, Nebr.

1955 Installations

- ① Lateral 19.1 (Mi 0.0 to 8.0), Tri-County Project, Nebr.
- ② Shell Canal (Mix test), near Greybull, Wyo.
- ③ Lateral 3 (1.75 miles), near Wellington, Colo.

1956 Installations

- ① Lateral 1 (Mi 0.0 to 6.2), North Platte Project, Wyo.
- ② Lateral 8.7 (12.7 miles), Tri-County Project, Nebr.
- ③ Stewart Farm (0.4 mile), near Fort Morgan, Colo.
- ④ Coors Farm (0.5 mile), near Center, Colo.
- ⑤ Farmers Irrigation Ditch (0.5 mile), near Loveland, Colo.
- ⑥ Weaver Ranch (2,000 feet), near Red Feather Lakes, Colo.
- ⑦ Christian Lateral (0.5 mile), near Loveland, Colo.
- ⑧ Zimelman Farm (0.5 mile), near Keensburg, Colo.
- ⑨ Trinchera Ranch (1.0 mile), near Fort Garland, Colo.
- ⑩ Twin Lakes Connection Canal (7,000 feet), near Aspen, Colo.
- ⑪ Lateral 7.2 (1.7 miles), near Hot Springs, South Dakota

1957 Installations (Evolution complete — final planning started)

- ① Bijau System, Fort Morgan, Colo.
- ② Fire Mountain Canal and Reservoir Co, Hotchkiss, Colo.
- ③ Fort Lyon Canal Co, Las Animas, Colo.
- ④ Imperial Irrigation District, Imperial, Calif.
- ⑤ Salt River Project, Phoenix, Ariz.
- ⑥ Terrace Irrigation Co, Monte Vista, Colo.

MAP SHOWING LOCATIONS
OF EXPERIMENTAL INSTALLATIONS



III. PRESENT RESEARCH AND DEVELOPMENT PROGRAM

The research and development project on sediment linings for canals was organized in July 1953, through the Colorado A and M Research Foundation, Department of Civil Engineering. The work has been supported by funds from contracts and contributions. The first contract was with the U. S. Bureau of Reclamation for studies starting in 1953. Since then, many additional groups have supported the research and development work.

To date, cooperative work has been initiated with 19 irrigation groups in Colorado, Nebraska, Wyoming, South Dakota, Arizona and California. In addition, technical and/or financial assistance has been furnished by four federal (U.S.) agencies, eleven bentonite companies, four chemical companies, and three equipment companies.

The general objectives of the research and development program are listed below:

1. To develop practical low-cost methods of sealing irrigation canals with colloidal clay sediments carried into place within the pervious soils by the canal loss water. This includes delineation of the physical phenomena involved, and learning to apply the results of such studies in a practical manner.
2. To evaluate such sealing methods in terms of cost, adaptability to old and new canals, reliability, ways to expand the present limits of application, and permanence.

3. To evaluate other effects of colloidal clay sedimenting, including the stabilizing effects on sandy canal bed soils, and the growth suppression effects on submerged water weeds.

The development program consists of two coordinated phases involving both field site and laboratory research. The field installation research is discussed first.

Field Installation Research

Because of the active support of the field installation phases of the research program, it has been relatively simple to arrange for new test sites. Thus, as a practical matter and because of the wide variations in canal site conditions from one area to another, the scope of the development work has been increased by adding carefully selected experimental installation sites.

The trials have been made at field sites on operating canals in (1) loess (wind-deposited silt or dust), (2) dune sands, (3) fractured rock (sandstones, siltstones and shales), and (4) sandy to clayey alluvial materials (6). Fig. 1 is a map showing the locations of the experimental sites.

All of the installations have been made in relatively small canals, representative of the range of pervious canal bed soils and operating conditions found in each system. Consequently, the experience gained in each installation has immediate usefulness in helping to solve other similar canal sealing problems elsewhere in each system. In addition, the results have a long range utility when considered from the standpoint of the over-all program.

Since emphasis has been placed on flexibility to meet the changing conditions from one site to another, it is difficult and perhaps unwise to generalize on the procedures followed in the field installations. However, because of the relatively large number of sites and the summarization objectives of this report, some generalization is necessary. Therefore, each experimental installation cannot be discussed in detail at this time. As sufficient evaluation data become available, detailed reports will be prepared for each installation. Thus, the generalized discussion of procedures in this report is grouped according to (1) evaluation of site conditions, (2) selection of sediment, (3) final testing and planning, (4) installation procedures, (5) evaluation of results, and (6) other effects of sedimenting.

Evaluations of site conditions -- Since adaption of the sedimenting procedures to the canal site conditions is an integral part of the sedimenting process, careful consideration of the site conditions is essential. Usually each site has been evaluated several times in cooperation with the local project engineer or manager. This cooperative aspect is vital, if a full understanding of the site conditions is to be obtained. Evaluation factors have usually included the following:

1. Under dry conditions if possible, observations of: range, extent and character of pervious canal bed soils; presence or absence of actively eroding or eroded areas; extent, character, and movement of bed-load sand; silt cake on pervious canal bed soils; silt berms on banks; secondary

void structures, such as worm or crayfish holes, root holes, drying cracks, and right-of-way accessibility -- obstruction by trees, buildings.

2. Under normal flowing water conditions, observations of: need for sealing; normal canal water losses; seep damage to nearby lands; best period for sedimenting; location of check structures; grade of canal; possibilities of ponding with the check structures under low flows; pattern of water deliveries -- continuous (during season or year around) or intermittent; length of dried-up period, if any, between deliveries.
3. Testing of the site conditions has usually included some additional water measurements and canal water analyses. Inflow-outflow measurements over the entire irrigation season have been obtained when possible. Where seeped land has been involved, depth to ground water records have been started. Where possible, data on the dissolved and suspended solids in the canal water have been obtained for each site. Determination of water quality at periodic intervals throughout the entire irrigation season is advisable because of seasonal variations (10).

Selection of sediment -- With the site conditions fully in mind, the next consideration involves the selection of a sedimenting agent that will (1) remain stably dispersed and suspended during the flowing canal water phase of the process, and (2) produce an adequate

sealing-in-depth effect within the pervious soils during the percolating loss water phase of the process. Unfortunately, the methods and materials used to satisfy one of the conditions, in some instances will not satisfy the other condition. Obviously, both conditions must be satisfied, if the desired effects and economies are to be achieved.

In many areas local clays are available or the canal waters may occasionally carry a colloidal clay content that could be modified and perhaps controlled for use as a sedimenting agent, but in the trials to date it has been more convenient to use the commercial grades of high-swell bentonite. These are reasonably uniform in quality, in good supply, and in common usage.

Depending on the amount of multi-valent cation (or salt) contamination in the available bentonites and in the site water, varying concentrations of a polyphosphate dispersant have been used to control the bentonite flocculation and settlement problems (2). This is especially important if a ponding procedure of sedimenting is contemplated. The polyphosphate additive has an additional beneficial effect in that it reduces the viscosity of the bentonite slurries, thus facilitating the mixing and pumping operations at the head end of the canal being sealed.

Considering the normal range of pervious soils and canal operating conditions, both within and between canals, it seems that there is no all-purpose sediment. The high-swell bentonites, however, through the use of various grinds, come very close to providing such an all-purpose sediment for materials of the intermediate to very

pervious ranges of permeabilities. For sealing materials of very open voids, granular rather than the normal powdered high-swell bentonites have been used, and in some instances supplemental sedimenting and bridging agents, such as a local clay, sawdust, etc. have also been used. For sealing materials of relatively small void openings where sediment penetration is a problem, the dispersing agent alone has potentialities if the in-place soil clays are of a dispersable nature.

Two tests have been used to evaluate potential sediments: (1) grit content, and (2) colloidal yield. The grit content is the percentage retained after washing on a 325-mesh screen. The colloidal yield is the per cent of materials remaining in suspension after 18 hours. In the latter test 10 grams of sample is thoroughly mixed into 500 grams of distilled water and allowed to stand undisturbed for 18 hours (7).

Final testing and planning -- The next considerations relate to the final testing and planning required to set up the sedimenting procedures. This has usually involved the following steps for each trial installation:

1. Additional trial mixes to determine type and concentration of sediment and chemical dispersant.
2. Calculation of total volume of sedimenting charge and total amounts of bentonite and dispersant.
3. Preparation of final cost estimates and plan of installation.

4. Final preparations for delivery of water, materials, mixing equipment, and experienced help for mixing and ponding phases of the sedimenting work.

In some instances, trial permeability tests (both field and laboratory) have been run to determine the concentration of sediment and ponding or exposure time needed to produce a satisfactory sealing effect (11).

The bentonite concentration has usually been set at one per cent. At this concentration the viscosity of the mix is very close to that of water alone. Problems can be produced at the higher concentrations owing to the viscous nature of the mixes, and at the lower concentrations owing to the lack of sediment stability. The concentration of dispersant required depends on the water and the sediment. It has usually ranged from none for soft water to as much as 20 per cent (by weight of bentonite) for very hard waters.

The calculations of the total amount of bentonite needed for the first installation in any new area, are at best an estimate. The amounts used in the first trials have been computed in several different ways: (1) 0.5 to 1.0 pound of bentonite per square foot of pervious wetted area in the reach being treated, and (2) $\frac{1}{4}$ to 2 tons per cfs of capacity per mile of canal. In both methods, the application rate is adjusted according to the intensity of seepage losses. The amounts obtained from the above methods have usually been cross-checked with the amounts required from the standpoint of the total sedimenting volume required to produce an adequate ponding. This has been accomplished by

combining the volume of the largest sedimenting pond with the estimated shrinkage in the upstream ponds and multiplying this total volume by the assumed sediment concentration to obtain an estimate of bentonite needed.

The time for sedimenting has usually been set by practical considerations, such as a period before, between, or after the normal irrigation water deliveries. Where sediment penetration problems have been anticipated, running into a dry canal has been recommended.

Installation procedures -- If properly planned and executed, the sedimenting process is a four-phase operation:

1. Mixing -- An appropriate kind and amount of sediment (plus dispersant and/or supplemental bridging agent, if needed) is adequately dispersed into the flow of sedimenting water into the canal reaches being treated.
2. Transportation -- The stable sedimenting mixture is controlled and routed down the canal reach being treated.
3. Penetration -- During its controlled travel (by ponding, if possible) down the canal, increments of the sedimenting mixture seep into the voids of the pervious zones of the canal bed and banks.
4. Sealing -- The sedimenting material in the seepage water is retained in the voids to produce a sealing-in-depth effect -- this probably being due to the accumulative actions of filtration, adsorption, gelation, ionic exchange, etc.

With the above operation as an objective in the present development work, the installation procedures at each site have usually involved the following steps: (1) presedimenting work, (2) mixing of sediment, (3) routing of sedimenting mixture, and (4) follow-up phase.

The presedimenting work required at each site has varied with the conditions from one site to another, but usually it has involved: (1) release of water for sedimenting run, (2) assembly of equipment and materials, and construction of mud pit, if needed, at head end of canal reach being treated, (3) preliminary mixes of water, sediment and dispersant to check stability and to calibrate hydrometers⁵, (4) cleaning of weeds from canal and waterproofing of check structures, and (5) arrangement for mixing and water running crews.

The mixing operation usually has involved the following steps: (1) mixing of bentonite slurry, (2) retention of slurry in a mud pit, and (3) dilution of slurry to concentration for sedimenting.

Various mixing methods have been used to disperse the sediment into the sedimenting charge of canal water. The most economical and effective mixing has been accomplished with the multiple jet devices, such as developed by The Central Nebraska Public Power and Irrigation District and Cronese Products, Inc. (see Photograph 1). On the smaller jobs and where the above jet mixers were not readily available, compressed air jetting into a wet layer of bentonite has been used (see Photograph 2). Single jet mixers and propeller type mixers, such

⁵ Various types have been used -- including standard Bouyoucos hydrometer with range of 2-60 grams/liter and extra sensitive hydrometer with 0 to 10 grams/liter range.



Photograph 1 View of Cronese mixer during Lateral 1 installation on North Platte Project in Wyoming. Photo courtesy of Wyoming Natural Resource Board.



Photograph 2 Mixing method involving the use of compressed air jetting into a wet layer of bentonite. Photo courtesy of U. S. Bureau of Reclamation.

as commonly used to mix oil field drilling and cementing fluids, and circulation methods through centrifugal pumps, have also been used.

Where possible, the bentonite slurry has been pumped into a long narrow retention pit before metering into a diluting flow of sedimenting water. This mud pit cycle provides (1) a control so that when necessary lumpy unsatisfactory mixes can be supplementally mixed by additional jetting, (2) extra time for "curing" or complete wetting of the bentonite, and (3) a standby volume and better control for slurry additions into the diluting water. The desired sedimenting concentration has usually been reached by regulating the diluting flow of clear water -- assuming a constant rate of slurry additions.

The actual sealing process is accomplished during the routing of the sedimenting mixture. Two general methods have been used: (1) ponding with existing structures and under very low flow conditions, and (2) full flow procedures where canal structures are not sufficiently close-spaced for adequate ponding under low flow conditions. The main consideration at this stage is one of providing a sufficiently ample ponding time or exposure time over the pervious areas so that an adequate sealing-in-depth effect is produced. Factors, such as the anticipated penetration and sealing problems, and the canal grades and locations of structures, will determine which method or a combination of methods is feasible.

Upon completion of the sedimenting run, several alternative courses of action have been used: (1) a clear water after-drive is run in immediately behind the sedimenting charge, (2) the canal is allowed

to dry out after the sedimenting, and (3) normal deliveries of irrigation water are resumed immediately after the sedimenting. The recommended procedure will vary with the water delivery demands, and to some extent, with the anticipated penetration and sealing problems. If penetration seems to be a potential problem, a clear water phase of ponding may be advisable. If penetration is easily achieved and sealing is the problem, it may be advantageous, if possible, to dry up the canal immediately after the sedimenting.

Evaluation of results -- If sealing of an existing canal is the sole purpose for the sedimenting operation, the important evaluation factors are somewhat simplified and will usually include: (1) actual amount of water and land saved, (2) the life expectancy of the sealing effect, and (3) the relation between costs and benefits.

As previously mentioned, a continuous record of the inflow and outflow for each test section of canal, both before and after the sedimenting, is desirable, but from a practical standpoint such a complete record is usually not obtainable. This situation is caused by (1) the length of the representative test reaches of canal, ranging from 0.4 to 12.5 miles long, and (2) the large number of turn-out flows. Thus, as a compromise, measurements over one relatively short period of the irrigation season, such as obtained by ponding and seepage metering, have been obtained. These loss figures have been translated to estimated seasonal loss figures, which of course are subject to question, but they are better than no loss measurements. It is hoped that these problems can be somewhat alleviated in future trial installations.

The life expectancy of a sediment sealing has not as yet been fully determined. This is one of the research objectives. It is likely, however, that the life of the sealing is closely related to the effectiveness of the adaption of the procedure to the site conditions. Evaluations are not complete as yet, but preliminary indications are that most of the sediment linings are still holding up satisfactorily -- some since the spring of 1954.

Where possible and as the necessary supporting data are obtained, cost-to-benefit comparisons are being made. The common method of comparing linings is by cost per square yard. Thus, the square yard costs, which are actually very low, have been calculated, but in addition, a cost per acre-foot of water saved has also been estimated. Significantly, even though the experimental costs of mixing, etc., are still quite high, the presently available costs per acre-foot of salvaged water have usually been less than \$3.00. Stated in another way, the experimental costs have usually been less than the value of the water salvaged in the first season. In some installations, value of reclaimed land is an added benefit, but as yet this value has not been added to the benefits.

In general, good sealing results have been obtained in the loessial and sandy soils. The initial results in fractured rock were not entirely favorable, but special sedimenting procedures are being developed for sealing these more pervious materials. Table 1 summarizes the available data for the experimental installations (as of June 1, 1956).

TABLE I

SUMMARY OF DATA -- EXPERIMENTAL INSTALLATIONS

Site	Dominant Soils Max. Size Canal Length of Reach	Construct. Period Mixing Method Instal. Method	Amt. of Bent. Total cost Cost/mi /sq yd ¹ -	Water saved (A.F.) ² Cost/A.F. Evaluation method	Remarks
<u>1954</u>					
E-65 Lateral Tri-County Proj. Nebraska	Loess 100 cfs head end 12.5 miles	4-5 to 4-16-54 Johnson multi-jet slow ponding	403 tons \$15,000 \$1200 and \$.075	10,600 in 2 yrs. \$1.42 ponding, end of yr.	Ponding tests of 54 and 55 seasons indicate losses 1/5 original rate.
Horse Crk Lat. N. Platte Proj. Nebraska	Sand, silt, rock 100 cfs head end 10 miles	4-23 to 5-10-54 oil field sing. jet, slow ponding	175 tons \$11,000 \$1100 and \$.10	Not directly applicable combination	Sealing primarily to save land. Groundwater level 1 to 3 feet lower.
Lat. 128 Kendrick Proj. Wyoming	Rock, silt, sand 50 cfs head end about 3 miles	5-13 to 5-16-54 oil field sing. jet, combination	55 tons \$3100 \$1033 and not determined	Not determined " " combination	Job cut short be- cause of break- down of installa- tion procedure.
Lat. No. 4 near Wellings- ton, Colorado	Sand, with clay layers 3 cfs 1 mile	Intermit. 54, 55 comp. air jetting full flow	10 tons \$300 \$300 and \$.075	120 in 1955 \$2.50 inflow-outflow	Mainly for mix tests. Losses cut from 50% to 7% after sedimenting.
Little Cache near Ft. Col- lins, Colorado	Sand, with clay layers 3 cfs 1.25 miles	Intermit. 54 MixCo. prop type full flow	2 tons \$60 \$48 and \$.005	60 in 1955 \$1.00 inflow-outflow	Mainly for mix tests. Losses cut from 43% to 19% after sedimenting.
<u>1955</u>					
Lat. 19.1 Tri-County Proj. Nebraska	Loess 60 cfs head end 8 miles	4-11 to 4-20-55 Johnson multi-jet slow ponding	290 tons \$10,000 \$250 and \$.08	3600 in 1st yr. \$2.78 ponding, end of yr.	Ponding tests, end of 55 season, indi- cate losses 1/8 original rate.

TABLE I --Continued

SUMMARY OF DATA -- EXPERIMENTAL INSTALLATIONS

Site	Dominant Soils Max. Size Canal Length of Reach	Construct. Period Mixing Method Instal. Method	Amt. of Bent. Total Cost Cost/mi /sq yd ¹	Water saved (A.F.) ² Cost/A.F. Evaluation method	Remarks
Shell Canal near Greybull, Wyoming	Sandstone and shale 100 cfs head end	8-29-55 comp. air jetting full flow	6 tons \$25 Not determined	Not applicable " " " "	Mixing test only
Lat. No. 3 near Welling- ton, Colorado	Sandy to clayey 6 cfs 1.75 miles	9-13 to 9-24-55 comp. air jetting full flow	4 tons \$125 \$71 and \$.06	30 in 1956 \$4.25 inflow-outflow	Mainly for mix tests. Losses cut from about 10% to 5% after sedimenting.
<u>1956</u>					
Lat. No. 1 N. Platte Proj. Wyoming	Dune sand 100 cfs head end 6.2 + miles	3-29 to 4-10-56 Cronese multi-jet slow ponding	240 tons \$11,800 \$1900 and \$.16	Not as yet available combination	Losses before about 22%. Immed. after from 1.5% to 16.5%.
Lat. 8.7 and sub lats. Tri- Co. Proj., Nebr.	Loess 40 cfs 12.7 miles	4-11 to 4-20-56 Johnson multi-jet slow ponding	280 tons \$10,000 \$788 and \$.10	Not as yet available combination	
Stewart Farm near Ft. Mor- gan, Colorado	Sand 5 cfs 0.4 mile	4-25, 27-56 comp. air jetting ponding	2 tons \$125 \$312 and \$.14	Not as yet available combination	Preliminary measure- ments indicate savings of about .77cfs.
Miller Farm near Sterling, Colorado	Sand 2.25 cfs 1000 feet	4-3,5 and 6-27-56 comp. air jetting ponding	3 tons \$175 \$925 and \$.35	Not as yet available inflow-outflow	Extra bentonite used to stabilize eroding banks.
Coors Farm near Center, Colorado	Sand, gravel 6 cfs 0.5 mile	5-24 to 5-26-56 comp. air jetting ponding	6 tons \$370 \$740 and \$.21	Not as yet available combination	Very coarse sandy soil 500gpm/0.5 mi. before 60gpm/0.5 mi. immed. after.

¹ Not accurate since wetted area is estimated and in some cases not all of the area needs lining.² Includes 1954 and/or 1955 evaluations -- no 1956 evaluations available at this time, June 1, 1956.

Secondary effects of sedimenting -- Several potential secondary effects of sedimenting have been encountered in the research and development program, including: (1) effect of sedimenting mixture on irrigated land, (2) stabilizing effects on non-cohesive canal bed soils, and (3) suppression effects on growth of submerged water weeds.

One of the most frequent questions asked by irrigators concerns the possible sealing effects that the sedimenting clay could produce on irrigated soils. Research activities on this possibility were originally planned, but initial installation experience indicates that with a minimum amount of precautions all of the clay is used up in the canal being sealed. During three years of experience no trouble of any kind has developed in this regard.

It has been recognized that by depositing a sedimenting clay in the pores of the canal bed and banks, stabilizing effects as well as seepage reduction effects could be obtained. In practice, definite stabilizing effects have been noted when a non-cohesive soil, such as a dune sand, has been sedimented. A fundamental study of this effect has also been started as part of a dissertation being prepared by I. S. Dunn of the Civil Engineering Department, Colorado A and M College.

Some varieties of submerged water weeds will not grow in muddy waters. Thus, the effect of sedimenting on the water weeds in some of the field sites has been noted. There are some indications that the clay has a smothering effect, but additional observations are needed to determine the effects more conclusively.

Fundamental Research Problems

During the field installation phases of the research and development work, a number of problems have been encountered that can advantageously be approached by research work of a fundamental nature. Thus, the fundamental research phase of the project program has included work on the following general subjects:

1. General characteristic of bentonites,
2. Dispersion characteristics of clay minerals, and
3. Fundamentals of penetration and sealing.

The primary objectives of these studies are to determine the fundamental principles involved in the sedimenting process. To expedite these studies, testing under closely controlled and restricted conditions has been emphasized. It has involved some of the more obvious and simplified variables of the actual sedimenting procedures and field site conditions.

General characteristics of bentonites -- Since bentonite has been the basic sediment in all of the trials to date, some of its general characteristics are outlined.

Bentonite is a generalized term which refers to a rather heterogeneous substance, composed mainly of the clay mineral montmorillonite and fragments of other minerals, such as feldspar, gypsum, calcium carbonate, quartz, and traces of other minerals. Its chemical composition can vary to a considerable extent but a highly colloidal nature seems to be one distinguishing feature common to all high-swell bentonites (7,18).

The colloidal properties and the stable dispersion potential of a high-swell bentonite may be ascribed to the very small size and inherent negative charge of the dispersed particles. The charge of the very small particles is apparently closely related to the character of the adsorbed cations. Therefore, when speaking of bentonite, it is necessary to keep in mind two general classes:

1. Those of a high ratio of sodium to calcium that can absorb large quantities of water, swelling considerably in the process, and remain reasonably dispersed and suspended in thin watery concentrations (such as used in sedimenting).
2. Those of a low ratio of sodium to calcium that can absorb much smaller quantities of water, do not swell greatly, and have a pronounced tendency to flocculate and settle rapidly from dilute suspensions in water.

A good high-swell bentonite can absorb nearly five times its own weight in water and at full saturation or hydration it occupies a volume 12 to 15 times its dry bulk. The swelling is reversible; it can be wetted and dried an infinite number of times provided the water is pure. When mixed with 7 to 10 parts water, it makes a gelatinous paste which will gel or set-up; with 15 to 20 parts of water, a milky flowable suspension is formed; and in a very dilute mixture, such as one part bentonite to 100 parts of water, 70 to 90 per cent of the bentonite will remain in suspension almost indefinitely in a nearly pure or salt-free water. The last concentration and dispersed state are of interest in the present sediment lining work.

Bentonite deposits or beds are found in many parts of the world, but the high-swell bentonites are principally found in the United States in Wyoming, South Dakota, Montana, Utah and California. Current prices range from \$1.00 to \$3.00 per ton, unprocessed at the pit, and from \$10.00 to \$50.00 per ton, processed and sacked at the plant or mill -- the higher prices usually include engineering and/or other service.

Dispersion characteristic of clay minerals -- The study on the dispersion of sedimenting colloids has been directed by B. N. Rolfe of the Technical Coordination Branch of the U. S. Geological Survey. It is a cooperative venture also involving Colorado A and M College and several chemical companies.

The research program on the dispersion of sedimenting colloids was undertaken to determine the factors affecting suspensions and their relation to sedimenting. As previously mentioned, the dispersion potential is apparently closely related to the particle size and flocculation character of the clay. Flocculation and dispersion of colloidal particles represent end stages in a long sequence of varying repellent and attractive forces. The primary components of these forces in colloidal clay suspensions are: (1) electrolyte content of the water, (2) kind and amount of cations present, and (3) kind and amount of colloid.

The attractive forces between colloidal clay particles are proportional to the electrolyte content of the water; the effect on the clays is slight at lower concentrations but increases sharply to coagulation at higher concentrations.


The amount of electrolyte needed for flocculation will vary with the kind of ions involved. Generally, the coagulant effect varies with ionic valence. For example, less trivalent aluminum is needed for flocculation than divalent calcium or univalent sodium.

The third factor in clay suspensions is the mineralogical and chemical nature of the colloid. Clay minerals such as montmorillonite have a large specific surface and cation exchange capacity. Kaolinite exhibits reverse properties, having a small specific surface and cation exchange capacity. Therefore, the effect of a native cation on kaolinite is negligible whereas that on montmorillonite is quite significant.

The polyphosphates aid in dispersion by (1) tying-up the multi-valent cations in the water, (2) reducing the viscosity of the bentonite mixtures, and (3) providing sodium ions to assist in the process.

Fundamentals of penetration and sealing -- The study of penetration and sealing is aimed at determining the conditions under which the sedimenting mixture may render adequate penetration and effective sealing-in-depth in the pervious soils. Initial studies in this regard have been accomplished under research assistantship arrangements by (1) R. B. Curry from June 1954 to July 1955, and (2) E. C. Newman from September 1955 to August 1956.

1. Studies by Curry (3) -- In order to reduce the number of variables to a minimum, Curry limited his materials to (1) four relatively inert sands and one highly reactive sand, (2) Wyoming high-swell bentonite, and (3) Fort Collins tap water. He found that a stably

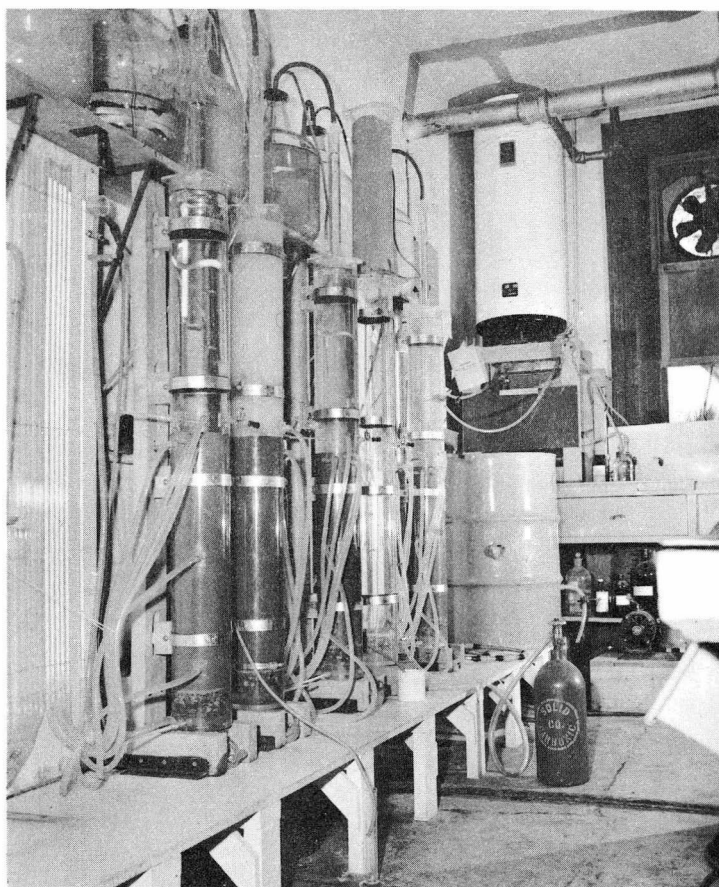

Photograph 3 General view of equipment used in the Newman studies.

dispersed bentonite would pass through the inert sands without retention or sealing, except for the very fine sands where a surface filter-cake type of sealing (without penetration) took place. By flocculating the dispersed bentonite within the pervious soil, a sealing could be produced, but only if the flow was stopped for 24 hours. Relatively high hydraulic gradients were used in this study. The need for chemical reactivity within the pervious soils was indicated, if a sealing was to be achieved with a dispersed bentonite.

2. Studies by Newman (14) -- Following the suggestions by Curry's work, Newman used the following materials: (1) dune sand with small amount of chemical activity due to small clay content, (2) Wyoming high-swell bentonite, (3) polyphosphate dispersant; (4) flocculating agent, and (5) Fort Collins tap water. He found that (1) the hydraulic gradient affected the entry of dispersed bentonite into the sand and the retention of bentonite, (2) the dispersed suspensions caused a leaching of soil clays and subsequent settlement and lower permeability of soil, (3) non-colloidal materials accelerated the formation of a surface filter cake, and (4) flocculated suspensions did not enter the test soil at hydraulic gradients up to 0.9 and the filter cake was considerably more permeable than a similar filter cake of dispersed bentonite. (See Photograph 3)

IV. CONCLUSIONS AND COMPARISONS

It is an old adage that "if at first you do not succeed, try try again". With this in mind it seems that the sedimenting method of sealing irrigation canals can be adapted to the conditions found in almost any canal. Past experience is helpful, but in applying the method in any new area, a cautious, small-scale approach involving the use of preliminary field trials is recommended to find the sediment and procedure to fit the site conditions. Thus, adaption is the major design problem and adaptability is the major practical advantage of the method, but by the very nature of the latter advantage, it is not feasible to develop a standardized material or method to fit all conditions.

After 3 years of experimental work, several important objectives and characteristics can be listed:

1. The sedimenting method is aimed at solving the serious canal lining problems facing many irrigation groups -- they have miles of canal to be lined but they cannot afford the conventional canal linings.
2. In many of the present-day canal lining operations, the canal site is altered and fitted to the canal lining method. In the sedimenting process, the reverse is true. The method is adapted to the site conditions.
3. In conventional lining methods accurate location of the leaky zones in the canal bed is desirable since these

are the ones to be lined. In the sedimenting method, this expense is largely avoided, since the sealing action is automatically concentrated in the leaky zones.

4. In conventional lining methods, equipment costs for sub-grade excavation and canal lining placement are a major item of expense. In the sedimenting method, these costs are almost entirely eliminated. The only equipment needed is for (1) canal cleaning, if needed, prior to sedimenting, and (2) sediment mixing at head end of canal system being lined.
5. Finding construction time for major lining jobs is commonly a serious problem for conventional methods. In contrast, the sedimenting method is very fast. An entire canal system can be treated in the time it takes for checked-up water to flow slowly through the system.
6. A considerable amount of extra labor and specialized help is normally required for large scale operations with conventional methods. In the sedimenting method, a major part of the work is best accomplished by the normal irrigation canal crews.
7. Because of the high costs, conventional canal linings are commonly restricted to trouble-spot applications, which seldom save much water when considered on a percentage basis of the over-all distribution system losses. Thus, the ultimate goal of the present development program is to produce a low-cost, mass-production method that can be practically applied in one system-wide operation.

BIBLIOGRAPHY

1. Canal linings and methods of reducing costs. U. S. Department of Interior, Bureau of Reclamation, 1952.
2. Chu, T. Y. and Davidson, D. T. Study of deflocculating agents for mechanical analysis of soils. Iowa State College Engineering Report No. 21, 1954, 1955.
3. Curry, R. B. Penetration and retention of bentonite suspensions in porous media. Colorado A and M College, Report No. CER 55RBC9, August, 1955.
4. Diagnosis and improvement of saline and alkali soils. U. S. Department of Agriculture, Agricultural Handbook No. 60, February, 1954.
5. Dirmeyer, R. D. Experiment bentonite sediment lining -- Lateral 218 -- Kendrick Project. Unpublished Bureau of Reclamation Memo to District Engineer (North Platte River District), June 30, 1953.
6. Dirmeyer, R. D. Report of sediment lining investigations, Fiscal Years 1954-55. Colorado A and M College, Report No. CER 55RDD7, June, 1955.
7. Fisk, H. G. Bentonite -- with test methods and results of tests of Wyoming bentonites. University of Wyoming, Natural Resources Research Institute, Bulletin No. 2, August, 1946.
8. Goss, R. E. The use of bentonite in decreasing the seepage loss in a canal. Unpublished Bureau of Reclamation Memo to Construction Engineer, All-American Canal, July 11, 1940.
9. Hosig, I. B. and Willson, R. J. Inspection of canal linings, Regions 6 and 7. Bureau of Reclamation Memo to Chief Engineer, July 17, 1952.
10. Jones, C. W., et al. Results of laboratory tests on soils and water for sediment lining demonstration -- lower cost canal lining program. Bureau of Reclamation Reports, No. EM-377, March 31, 1954 and No. EM-399, January 10, 1955.
11. Lancaster, D. M. Field trip to Kendrick Project, North Platte Project, and Bostwick Unit. Unpublished Bureau of Reclamation field trip report to Chief Engineer, November 23, 1953.
12. Lee, C. H. Sealing Chenery Reservoir. Western Construction News, December 25, 1930, p. 621-25.

BIBLIOGRAPHY --Continued

13. Matthes, G. H. Solids in stream flow. Transactions, American Geophysical Union, 30:3, June, 1949, p. 421-425.
14. Newman, E. C. The penetration and sealing effects of dispersed and flocculated bentonite suspensions in a dune sand. Unpublished Master of Science thesis, Civil Engineering Department, Colorado A and M College, August 1956.
15. Principles of drilling mud control. University of Texas, Petroleum Extension Service, 9th ed., 1952.
16. Reeves, A. B. Linings for irrigation canals. Paper presented at National Reclamation Association meeting at Portland, Oregon, November 8-10, 1954.
17. Robinson, A. R. and Rohwer, Carl. Canal seepage. Paper presented at Convention of American Society of Civil Engineers at San Diego, California, February 10, 1955.
18. Rodgers, W. F. Composition and properties of oil-well drilling fluids. Gulf Publishing Company, 1953.
19. Sokolovskii, A. N. Utilization of the properties of soil colloids for engineering purposes. Associated Technical Services, Translation RJ-85, East Orange, New Jersey.
20. Symposium on exchange phenomena in soils. American Society for Testing Materials, 15th Anniversary Publication, Special Publication No. 142, June 27, 1952.
21. Torrey, P. D. Application of surface chemistry to oil recovery. The Mines Magazine, 42:11, November, 1952, p. 101-106.
22. Willson, R. J. Inspection of canal linings, Regions 6 and 7. Bureau of Reclamation, Design and Construction Division, Denver, Colorado, June 1953.